









EVOLUTION OF AIR CONTROL



PRODUCT CATALOG

Valves, TPMS, Tools & Accessories










Vehicles

	motorcycle
	scooter
	bicycle
	car
	van
	truck
	tractor
	earthmover (EM)



Norms

TR	Tire and Rim Association (US)
ETRTO	European Tyre and Rim Technical Organisation

Material

	brass
	aluminium
	steel
	rubber
	plastic
	nickel-plated
	anodized
	zinc-plated
	chrome-plated

Features

	round top valve cap
	long round top valve cap
	plastic valve cap with sealing
	plastic valve cap without sealing
	hexagonal valve cap
	screw driver valve cap
	plastic valve extension cap
	metal valve extension cap
	DS-P valve cap
	V2B valve cap
	hexagon nut
	external hexagon valve base



09



19



43



95



75



83



101



113




131



137



121

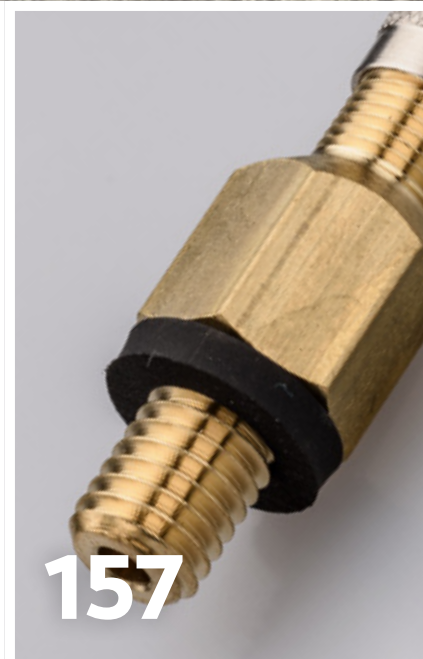

157

CONTENT

HISTORY	6	TOOLS	113
		Valve mounting tool	114
		Rethreading tools	116
		Valve screw driver	117
		Other tools	119
TPMS	9	VALVE CAPS	121
Universal sensor sens.it RS	10	Car / truck valve caps	122
Sensor valve kits	14	Double seal valve caps	127
Starter kits	15	Bicycle valve caps	128
Programming and diagnostic tools	16	EM large bore valve caps	129
CAR & VAN VALVES	19	VALVE CORES	131
Snap-in rubber valves	21	Standard valve cores	132
Metal valves	31	EM large bore valve cores	135
High-pressure valves	37	TIRE FILLING EQUIPMENT	137
TRUCK VALVES	43	Clip-on air chucks	138
TPMS valves	44	Clip-on ball foot air chucks	140
Rim valves	46	Thumb-lock air chucks	142
Tube valves	60	Service station dual foot air chucks	145
Valve extensions	64	Tire inflators & accessories	153
AGRICULTURAL VALVES	75	SCREW IN VALVES	157
Air/water valves	76	Screw in valves	158
Accessories for agricultural valves	78	Rim ferrule	161
Water filling and emptying devices	79	PART NUMBERS	162
EARTHMOVER VALVES	83		
Large bore valves	84		
Large bore valves with base	86		
Large bore valve extensions	88		
Accessories	91		
MOTORCYCLE VALVES	95		
Valve hole 8.3	96		
Valve hole 11.3	98		
BICYCLE VALVES	101		
Express valve	102		
Universal express valve	104		
Presta valve (Sclaverand)	106		
Air pump valve adapter	107		
Universal service station air chuck	108		
Rotatable tire inflator	110		

HISTORY



1880

In 1880 Margarete Steiff founded her own company in the Swabian town of Giengen, Brenz. With the first Steiff animal, a small elephant made from felt, which was originally intended as a pincushion, the world's first soft toy was invented.



1920



The founding of the ALLIGATOR valve factory in 1920 can also be traced back to the inventive spirit of Richard Steiff: Just in time at the start of the great bicycle boom - at the end of the First World War - Steiff established an industrial mass production for bicycle valves.

1998

ALLIGATOR acquires the EHA Valve Factory W. Fritz Ltd. & Co. EHA was founded as the "First Hanau Precision Screw Factory" which developed and produced the first Snap-in valves with a unique rubberization process.


2019



In 2019, parts of the ALLIGATOR Valves Factory Ltd. was sold to WEGMANN automotive. With the sale, the market leader in the field of balancing weights took over the ALLIGATOR brand name as well as the ALLIGATOR sales and distribution in Europe and North America for both tyre valves as well as TPMS sensors and tools.

1887

New innovations followed, driven in particular by Margarete's nephew Richard Steiff, who joined the company in 1887, and who created, among other things, the world-famous teddy bear.



1930



Innovation and tailor-made Problemsolving have always been the driving force for ALLIGATOR. For instance, the "ALLIGARO Pump Light" bicycle valve appeared as early as 1930, which was the predecessor of the later Blitz valve. High seal quality, low inflation resistance and easy handling distinguished this product from all other available bicycle valves.

2012

ALLIGATOR sens.it wins the Innovation Award with its programmable TPMS sensors.

2020

In 2020, ALLIGATOR will celebrate its 100th anniversary.



TODAY

At ALLIGATOR, our customers are the focus of our actions for more than 100 years. That is why we apply the highest quality standards in the development of our products.

Under the roof of WEGMANN automotive Ltd. over one million ALLIGATOR products are manufactured daily in Europe, which are then sold to customers in more than 60 countries worldwide. The extensive product range covering tyre valves and sensor technology offers practical solutions for a variety of applications. All these products have one thing in common: they are optimised for the use and the benefit of the end user and the Workshop.





TPMS

As a long-standing OE supplier of TPMS tire valves, ALLIGATOR has made its business to develop a very simple and practical solution for the TPMS replacement market: the freely programmable sens.it RS universal sensors.

CONTENT

Universal sensor sens.it RS 10

Sensor valve kits 14

Starter kits.....15

Programming and diagnostic tools 16

sens.it^{RS}

One sensor for all vehicles

TPMS challenges for the workshop

Increasing number of different TPMS sensors

- High stock of sensors to ensure availability at short notice.
- Vehicle-specific teach-in procedures are time-consuming and often flawed.
- Service times are getting longer.

Our solution: sens.it RS – the programmable universal sensor

The practical solution for the replacement market

- Only one sensor for all vehicle models.
- Just-in-time programming for vehicle-specific spare parts.
- Program – teach – drive.

Advantages


- **Top coverage:** Vehicle coverage of 98%
- **Short coverage times:** Standardized assembly without waiting for the right spare part
- **High functionality:** OE quality from ALLIGATOR
- **Less costs:** No software or update costs plus savings on storage and logistics costs



Coverage list

- Listing of all vehicle models covered by sens.it RS sensors.
- Ongoing addition of new models.
- Coverage list is updated monthly.

To the current coverage list
<https://bit.ly/3FfxvI4>



TPMS training

ALLIGATOR prepares your employees for TPMS with extensive practical training. Please ask for our TPMS training offer.

E-mail: sens.it@wegmann-automotive.com
 Phone: (+49-931) 32104-444

TPMS TOOLS FOR THE FUTURE

- Multiple programming of sensors (VT57 & TECH 600)
- High vehicle coverage including brand/model/year of construction
- OBD interface
- Color display and proven menu navigation
- Bluetooth and WiFi
- Wireless updates
- ... and many other features



ATEQ
VT47

9-590926



ATEQ
VT57

9-590925



Bartec
TECH 350

9-590924



Bartec
TECH 600

9-590923



Universal sensor RS3

For metal valves

- **Application:** Suitable for all steel and aluminum wheels
- **Range of functions:** OE quality
- **Sensor-valve connection:** Screw connection with ball-joint



Sensor RS3

Art. no.	Description	Mounting	Frequency range (MHz)	Adjustable angles (°)	Qty	Vehicle type
9-590914	Universal TPMS sensor RS3 (without valve)	Ball-joint	433	12-40	1	

TPMS aluminum valves for RS3

Valve hole 11.3 + 0.4 mm



Art. no.	Color	Mounting	Valve type	Valve length (mm)	Installation torque for bolt and nut (Nm)	Qty	Vehicle type	Surface	Valve cap
9-590906	Silver	Ball-joint	Screw valve	43	3.3	1		Elox	
9-590904	Titanium gray	Ball-joint	Screw valve	43	3.3	1		Elox	
9-590908	Black	Ball-joint	Screw valve	43	3.3	1		Elox	

Maximum working pressure: 14 bar / 200 psi
All valves are supplied with a screw.
Only use with nickel-plated valve core to avoid corrosion!

Spare part

Art. no.	Description
9-030000	Screw M5, Torx TX15

Universal sensor RS4

For snap-in valves

- **Application:** Vehicles with original TPMS rubber valve variant or maximum speeds up to 210 km/h / 130 mph
- **Range of functions:** OE quality
- **Sensor-valve connection:** Clip-pin mechanism



Sensor RS4

Art. no.	Description	Mounting	Frequency range (MHz)	Fixed angle (°)	Qty	Vehicle type
9-590918	Universal TPMS sensor RS4 (without valve)	Clip-pin	433	20	1	

TPMS rubber valve for RS4

Valve hole 11.3 + 0.4 mm



9-590916

Art. no.	Mounting	Valve type	Valve length (mm)	Pressure range (bar/psi)	Qty	Vehicle type	Valve cap
9-590916	Clip pin	Snap-in valve	43	4.5 / 65	1		

Sensor valve kits

Sensor with matching valve

PREPROGRAMMED SENSORS

On request, we can also deliver the sensors pre-programmed.



Sensor valve kits

For use in the workshop

Art. no.	Description	Qty
9-591122	1x universal sensor RS3 (9-590914) 1x aluminum valve, silver (9-590906)	1
9-591123	1x universal sensor RS3 (9-590914) 1x aluminum valve, black (9-590908)	1
9-591124	1x universal sensor RS4 (9-590918) 1x with rubber valve (9-590916)	1



Sensor valve kits in tray packaging

For large purchase quantities

Art. no.	Description	Qty
9-590961	Universal sensor RS3 (9-590914) with pre-assembled silver aluminum valve (9-590906). Nuts are supplied separately.	144 (8 trays x 18 pcs.)
9-591061	Universal sensor RS3 (9-590914) with pre-assembled black aluminum valve (9-590908). Nuts are supplied separately.	144 (8 trays x 18 pcs.)
9-590965	Universal sensor RS4 (9-590918) with pre-assembled snap-in valve (9-590916).	144 (8 trays x 18 pcs.)

To the mounting instructions for TPMS sensors in tray packaging

<https://bit.ly/3kzxtkA>



Starter kits

The perfect introduction to TPMS service



Tool bundle PT3

- 1x programming/diagnostic tool PT3 9-030229
- 24x universal sensor RS3 9-590914
- 24x aluminum valve, silver anodized 9-590906
- 1x operating instructions

Art. no. 9-590938



Starter kit PT1

- 1x programming tool PT1 9-590922
- 8x universal sensor RS3 9-590914
- 8x aluminum valve, silver anodized 9-590906
- 1x operating instructions

Art. no. 9-590919



Mini starter kit PT1

- 1x programming tool PT1 9-590922
- 4x universal sensor RS3 9-590914
- 4x aluminum valve, silver anodized 9-590906
- 1x operating instructions

Art. no. 9-590933

TPMS programming and diagnostic tool PT3

Wireless and handy

Functions:

- Programming and cloning ALLIGATOR sens.it sensors
- Readout of all TPMS sensors possible
- OBD2 diagnostic module integrated
- Integrated teaching procedure
- Information in 23 languages
- Simple operation: Vehicles selected by brand, model, and year
- Five years of free sens.it software updates

Advantages:

Art. no.	Description	Sensor type	Frequency	Cable connection	Housing
9-030229	Programming and diagnostic device PT3	sens.it RS, sens.it ONE	433 MHz	USB	Rubber protective cover



Scope of delivery:

- 1x PT3
- 1x charger
- 1x USB cable
- 3x socket adapter
- 1x operating instructions

TPMS programming tool PT1

The ideal addition to hand-held TPMS tools

Functions:

- Programming and cloning ALLIGATOR sens.it sensors

Advantages:

- Software guides user intuitively through the programming and teach-in process
- Operating errors are excluded
- Always up-to-date with free software through online connection
- New vehicles are constantly being added to the software

Art. no.	Description	Sensor type	Frequency	Cable connection	Housing
9-590922	Programming device PT1	sens.it RS, sens.it ONE	315 MHz, 433 MHz	USB type A	Rubber protective cover



To the PT1 operating instructions

<https://bit.ly/3FsM9Md>





CAR & VAN VALVES

ALLIGATOR rubber and metal valves are an integral part of the valve world and have been used successfully in the passenger car and van sector for decades.

CONTENT

Snap-in rubber valves	21
Metal valves.....	31
High-pressure valves	37

ALLIGATOR VALVES

ALWAYS THE RIGHT CHOICE!



SNAP-IN RUBBER VALVES

Flexible and easy to mount

- **Application:** Passenger car, trailer
- **Pressure range:** Up to 4.5 bar / 65 psi
- **Properties:** Elastic valve shaft, easy assembly
- **Fit:** Suitable for ETRTO rims
- **Series:** OE Premium and ALLIGATOR line
- **Proper storage:** Cool and dark, protected from sunlight and ozone.

NOTE

At more than 210 km/h / 13 mph use either metal valves (clamp-in) or valve supports to prevent the valve from bending by more than 25° due to centrifugal force.

OEM QUALITY

Only high-quality materials such as EPDM rubber are used to manufacture the valves. This particular material has a high resistance to ozone, sunlight, and chemicals and thus extends the service life of the valve.

EXTENSIVE PRODUCT RANGE

ALLIGATOR offers an extensive range of valves for passenger cars, vans, trucks, motorbikes, scooters, bicycles, tractors, and earthmovers.

HIGH LEVEL OF SERVICE

In day-to-day business, ALLIGATOR is always there for its customers with advice and support. Information such as assembly instructions are also provided.



MOUNTING RUBBER VALVES

Snap-in valves can be installed quickly and professionally

Rims suitable for rubber valves:


- Round, non-oval valve hole with diameter 11.3 -0/+0.4 mm.
- Valve hole must be free of burrs and damage and must comply with ETRTO regulations.
- The rim thickness is min. 1.8 mm and max. 4 mm.




MAKE SURE TO FIT THE VALVE CAP.
It protects against dirt and corrosion.

A Ø	B
8,8 mm	TR438
11,3 mm	TR412
	TR413
	TR414(L)
	TR418
	TR600XHP
	TR602XHP
15,7 mm	TR415


When selecting the valve, pay attention to the rim hole diameter.

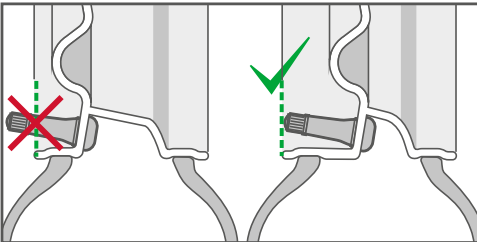


The rim valve must not protrude beyond the outer edge of the rim.

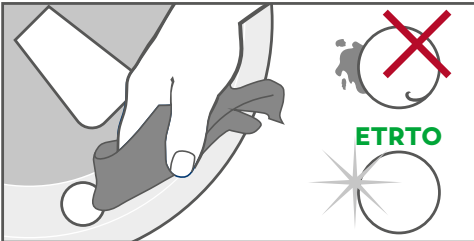


The valve hole must be free of dirt and burrs and comply with ETRTO.

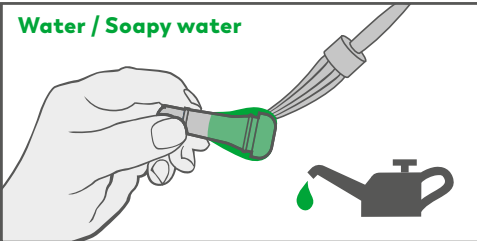


Coat the valve with (soapy) water to facilitate assembly and prevent damage.

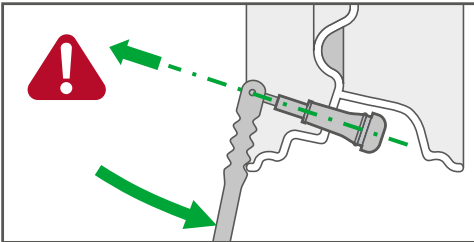


Retract the valve axially without angling it. Do not tilt or overstretch.

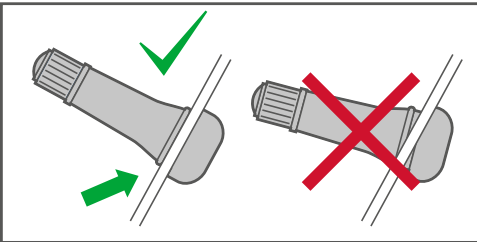

Make sure the valve is well seated in the rim and check the valve for damage.

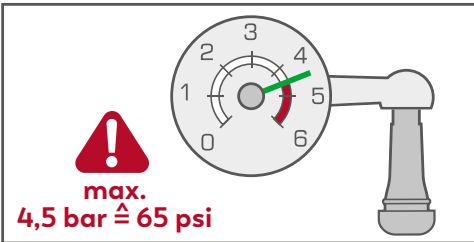

Note
Rubber valves can be used up to a pressure range of 4.5 bar / 65 psi.

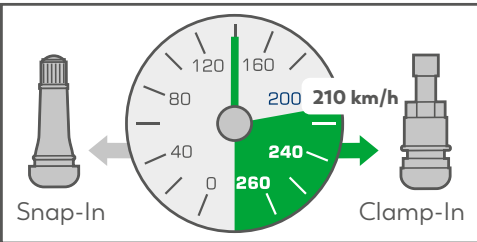

Note
The max. permissible speed for snap-in valves is 210 km/h / 130 mph. For higher speeds (index V, W, Y, ZR), metal valves must be used for safety reasons.

WHY CHANGE VALVES?

Pressure loss due to high stress

What influences is a rubber valve exposed to?

- Brittleness of the rubber due to ozone in the air, heat from the environment, and the radiant heat of the brakes
- Corrosion due to the ingress of dirt
- Weight load due to centrifugal forces at high speeds
- Damage due to stone impact or contact with the curb

Replace valves for more safety

- Replace the valve every time you change the tire.
- Look for functional valve caps as protection against dirt, water, and creeping pressure loss.
- Use quality valves from ALLIGATOR – designed for heavy-duty use.



**YOUR SAFETY
DEPENDS ON IT!**

DO NOT OVERLAY RUBBER VALVES

Proper storage and assembly

Instructions for mounting

- **Good and proper lubrication:** Avoid cracks during assembly.
- **Pull in without angular offset:** Pulling in at an angle significantly increases the load and thus the risk of damage to the valve.

Notes on storage

- Do not store valves for extended periods: Use the first-in, first-out method (do not buy in stock).
- Proper storage: Cool and dark, protected from sunlight and ozone, not in the same room with electrical equipment (e.g., compressors) or chemicals.

What happens with incorrect storage

- Incorrect storage accelerates the natural aging of the rubber.
- The elasticity of the rubber decreases.
- Cracks may appear in the clamping area due to the expansion caused during assembly.
- Risk of pressure loss in the tire due to growing cracks or tears in the valve.
- Risk of a flat tire or accident greatly increased.



Old, torn valve



Ozone cracks



Axial drawing in



OE Premium Line

For the highest demands

- **Application:** OE manufacturer (original equipment) / aftermarket
 - **Quality checks/standard:** Meets OEM requirements (significantly higher than ETRTO & DIN)
 - **Testing:** 100% process monitoring at every step
 - **Material:** High-quality, resistant special rubber compound
- **Properties:** High resistance to ozone, UV light, and chemicals
 - **Marking on the valve base:** ALLIGATOR + TR41x
 - **Laser marking:** Individual marking of rubber valves possible
 - **Traceability:** High product traceability



Valve hole 11.3 + 0.4 mm

Art. no.	TR no.	Variant	ETRTO no.	Valve length (mm)	Qty	Vehicle type	Valve caps
9-521515	TR412	mounted	V2.03.6	33	100		
9-521520	TR412	with DS-P cap	V2.03.6	33	20		
9-521527	TR412	unassembled	V2.03.6	33	100		
9-521545	TR412	with metal cap	V2.03.6	33	100		
9-522445	TR413	mounted	V2.03.1	43	100		
9-522032	TR413	partly assembled	V2.03.1	43	100		
9-522018	TR413	unassembled	V2.03.1	43	100		
9-522070	TR413	with extension cap	V2.03.1	43	100		
9-522099	TR413	with metal sleeve	V2.03.1	43	100		
9-522036	TR413	with metal cap	V2.03.1	43	100		
9-523445	TR414	mounted	V2.03.2	49	100		
9-523131	TR414	partly assembled	V2.03.2	49	100		
9-523018	TR414	unassembled	V2.03.2	49	100		
9-523099	TR414	with metal sleeve	V2.03.2	49	100		
9-523036	TR414	with metal cap	V2.03.2	49	100		
9-529445	TR414L	mounted	V2.03.8	56.5	100		
9-525445	TR418	mounted	V2.03.4	61.5	100		
9-525018	TR418	unassembled	V2.03.4	61.5	100		
9-525036	TR418	mounted	V2.03.4	61.5	100		

Valve hole 8.8 + 0.4 mm

Art. no.	TR no.	Variant	Valve length (mm)	Qty	Vehicle type	Valve caps
9-520542	438	Partly assembled with metal cap	41	100		

Valve hole 15.7 + 0.4 mm

Art. no.	TR no.	Variant	ETRTO no.	Valve length (mm)	Qty	Vehicle type	Valve caps
9-524145	415	mounted	V2.03.3	43	100		

Standard Qty: 100 pcs. in bag, 1,000 pcs. in box, 36,000 pcs. on pallet





ALLIGATOR Line

Reliably tested quality

- **Application:** Aftermarket
 - **Quality checks/standard:** Complies with the ETRTO standard
 - **Testing:** 100% check for function and tightness
 - **Material:** High-quality rubber compound
- **Properties:** High ozone, UV light, and chemical resistance
 - **Marking on the valve base:** ST-EHA + TR41x
 - **Laser marking:** –
 - **Traceability:** High traceability via packaging

Valve hole 11.3 + 0.4 mm

Art. no.	TR no.	Variant	ETRTO no.	Valve length (mm)	Qty	Vehicle type	Valve caps
9-529900	TR412	mounted	V2.03.6	33	100		
9-529904	TR412	partly assembled	V2.03.6	33	100		
9-529902	TR412	unassembled	V2.03.6	33	100		
9-529910	TR413	mounted	V2.03.1	43	100		
9-529914	TR413	partly assembled	V2.03.1	43	100		
9-529912	TR413	unassembled	V2.03.1	43	100		
9-529920	TR414	mounted	V2.03.2	49	100		
9-529924	TR414	partly assembled	V2.03.2	49	100		
9-529922	TR414	unassembled	V2.03.2	49	100		
9-529930	TR414L	mounted	V2.03.8	56.5	100		
9-529934	TR414L	partly assembled	V2.03.8	56.5	100		
9-529932	TR414L	unassembled	V2.03.8	56.5	100		
9-529950	TR418	mounted	V2.03.4	61.5	100		
9-529954	TR418	partly assembled	V2.03.4	61.5	100		



Standard Qty: 100 pcs. in bag, 1,000 pcs. in box, 36,000 pcs. on pallet



HIGH PRESSURE AND EXTREME CONDITIONS? NO PROBLEM!

THE ASC SEALING CONCEPT



METAL VALVES

Also for wheels under heavy loads

- **Application:** Passenger cars, vans, campers
- **Pressure range:** Up to 14 bar / 203 psi
- **Properties:** Robust design, high tightness
- **Fit:** Suitable for ETRTO rims
- **Series:** Standard and ASC family valves
- **Proper storage:** Cool and dark, protected from sunlight and ozone.

NOTE
If the speed exceeds 210 km/h / 130 mph, metal valves (clamp-in) must be used.

Highlights



ASC (Advanced Sealing Concept)

Advanced sealing concept for highly stressed wheels

Sealing concept:

- Tightening forces are introduced directly into the metal of the rim.
- Seal can fulfill its task regardless of external forces.











Advantages:

- High temperature resistance even under extreme conditions.
- Secure sealing.
- Seal adapts to the valve hole.
- No damage to the seal during assembly.
- Firm fit over a long period of use.
- Nut can be mounted with the valve cap screwed on.



ASC family

Valve hole 11.3+0.4 | brass






















Art. no.	Description	Valve length (mm)	Wrench size	Installation torque (Nm)	Qty	Vehicle type	Surface	Valve caps	
9-512512	31 MS ASC-HT	31.5	11	4-6	20		Ni		★
9-512514	31MS ASC-HT with V2B	31.5	11	4-6	20		Ni		
9-512573	40MS ASC-HT	40	11	4-6	20		Ni		★
9-512583	47MS ASC-HT	47	11	4-6	20		Ni		
9-512593	60MS ASC-HT	60	11	4-6	20		Ni		

HT = high temperature



Valve hole 11.3 + 0.4 mm

Brass

Art. no.	Description	TR no.	ETRTO no.	Valve length (mm)	Wrench size	Installation torque (Nm)	Qty	Vehicle type	Surface	Valve caps
9-516023	36MS		V2.04.1 EQ	36	14	3-5	20		Ni	
9-511983	37MS			37	14	3-5	20		Ni	
9-512503	39MS	416S	V2.05.1	39	14	3-5	20		Ni	
9-512507	39MS unmounted	416S	V2.05.1	39	14	3-5			Ni	
9-512563	42MS with plastic washer			42	11	3-5	20		Ni	
9-512553	42MS without plastic disc		V2.05.3	42	11	3-5	20		Ni	
9-513103	42MS with short nut		V2.05.4	42	14	3-5	20		Ni	
9-513143	42MS with high nut			42	14	3-5	20		Ni	
9-512462	42MS partly assembled			42	14	3-5	500		Ni	
9-512628	43MS			43	14	3-5	20		Ni	
9-513003	45MS (classic car)			45	13	3-5	4		Ni	

Valve hole 11.3 + 0.4 mm
Brass



Art. no.	Description	Valve length (mm)	Wrench size	Qty	Vehicle type	Surface	Valve caps
9-519003	Metal tube valve 43MS	43	17	20		-	
















Valve hole 6.3 + 0.4 mm
Brass



Art. no.	Description	Valve length (mm)	Wrench size	Installation torque (Nm)	Vehicle type	Surface	Valve caps
9-594150	39.5MS Enkie	39.5	11	3-5		Cr	



Valve hole 11.3 + 0.4 mm
Aluminum

Art. no.	Description	Valve length (mm)	Wrench size	Installation torque (Nm)	Qty	Vehicle type	Surface	Valve caps
9-513043	34LMS	34	14	4-6	20	 	-	
9-515003	36LMS	36	14	4-6	20	 	-	
9-590046	43LMS, silver	43	11	3-5		 	Elox	
9-512558	43LMS, black	43	11	3-5	20	 	Elox	
9-512568	43LMS, titanium gray	43	11	3-5	20	 	Elox	

Only use with nickel-plated valve core to avoid corrosion!

Valve hole 8.3 + 0.4 mm
Brass



Art. no.	Description	Valve length (mm)	Wrench size	Installation torque (Nm)	Qty	Vehicle type	Surface	Valve caps
9-511992	26MS	26	11	5-7	20		Ni	
9-511003	33MS with two sealing rings	33	10	3-5	20		Ni	
9-511993	39MS with high nut	39	11	5-7	20		Ni	

Spare parts for 9-511003






Art. no.	Description	TR no.	Material	Surface
9-323020	Round washer	RW12EQ	Fe	Zn
9-030731	Sealing ring		Rubber	

Valve hole 9.7 + 0.4 mm

Brass



9-516103




Art. no.	Description	Valve length (mm)	Wrench size	Installation torque (Nm)	Qty	Vehicle type	Surface	Valve caps
9-516103	35MS	35	14	4-6	20	 	Ni	

Valve hole 15.7 + 0.4 mm

Brass



9-512013

Art. no.	Description	TR no.	ETRTO no.	Valve length (mm)	Wrench size	Installation torque (Nm)	Qty	Vehicle type	Surface	Valve caps
9-512013	40MS	416eq	V2.05.2	40	14	3-5	20	 	Ni	

HIGH-PRESSURE VALVES

Easy to assemble and pressure resistant

- **Application:** Vans, campers
- **Pressure range:** Up to 7 bar / 102 psi (CVV)
Up to 6.9 bar / 100 psi (TR series)
- **Properties:** Combined rubber-metal valve
- **Fit:** Suitable for ETRTO rims
- **Series:** TR HP/TR XHP and CVV
- **Proper storage:** Cool and dark, protected from sunlight and ozone

NOTE

Do not use valve extensions for high-pressure valves.

Highlights



9-530020



9-530030

TR high-pressure valves (TR XHP/TR HP)

Standard high-pressure valves


- **Pressure range:** Up to 6.9 bar / 100 psi
- **Properties:** Vulcanized rubber-metal bond

TR HP = TR high-pressure valves
TR XHP= TR extra high-pressure Valves

SMALL DIFFERENCE - BIG EFFECT

TR 600XHP with optimized rubber-metal bond and extra-long metal stem.





- More stability
- Higher pressure resistance






TR XHP TR HP



Valve hole 11.3 + 0.4 mm

Art. no.	Description	TR no.	ETRTO no.	Valve length (mm)	Pressure range (bar/psi)	Temperature range (°C)	Qty	Vehicle type	Material	Surface	Valve caps
9-095519	TR 600XHP	600HPeq	V3.23.1	43	< 6.9 / 100	-40 / +100	100	 	CuZn	-	
9-095554	TR 602XHP	602HPeq	V3.23.2	62.1	< 6.9 / 100	-40 / +100	100	 	CuZn	-	

Valve hole 15.7 + 0.4 mm

Art. no.	Description	TR no.	Valve length (mm)	Pressure range (bar/psi)	Temperature range (°C)	Qty	Vehicle type	Material	Surface	Valve caps
9-521214	TR 801HP	801HP	48.2	< 6.9 / 100	-40 / +100	100	 	CuZn	-	

CVV (commercial vehicle valves)

Super easy to assemble
























- **Pressure range:** Up to 7 bar / 102 psi
- **Properties:** Easy (dis)assembly, high pressure resistance

ADVANTAGES AT A GLANCE

- Secure sealing in the rim
- High pressure resistance
- Simplest hand assembly
- Easy removal – without special tools, without rim damage



Valve hole 11.3 + 0.4 mm

Art. no.	Description	ETRTO no.	Valve length (mm)	Pressure range (bar/psi)	Temperature range (°C)	Qty	Vehicle type	Material	Surface	Valve caps
9-530050	CVV31	V3.23.3	31	< 7 / 102	-40 / +130	20	 	CuZn	Ni	
9-530060	CVV31 with DS-P	V3.23.3	31	< 7 / 102	-40 / +130	20	 	CuZn	Ni	
9-530021	CVV40	V3.23.4	40	< 7 / 102	-40 / +130	20	 	CuZn	Ni	
9-530020	CVV40	V3.23.4	40	< 7 / 102	-40 / +130	100	 	CuZn	Ni	 ★
9-530031	CVV47	V3.23.5	47	< 7 / 102	-40 / +130	20	 	CuZn	Ni	
9-530030	CVV47	V3.23.5	47	< 7 / 102	-40 / +130	100	 	CuZn	Ni	 ★
9-530041	CVV60	V3.23.7	60	< 7 / 102	-40 / +130	20	 	CuZn	Ni	
9-530040	CVV60	V3.23.7	60	< 7 / 102	-40 / +130	100	 	CuZn	Ni	


CVV INSTRUCTION

ASSEMBLY


Quick and easy to assemble by hand

Preparation:

- Thoroughly clean the rim flange and valve hole area. Check the valve hole area of the rim for damage.
- Coat the valve with water/soapy water or similar suitable lubricants before installation.

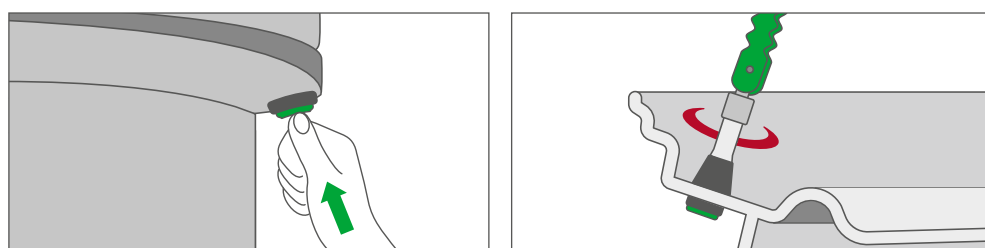

Press the valve in by hand without using too much force. Or mount gently with the ALLIGATOR standard valve mounting tool. The valve must be pulled in axially to the rim hole – do not tilt.

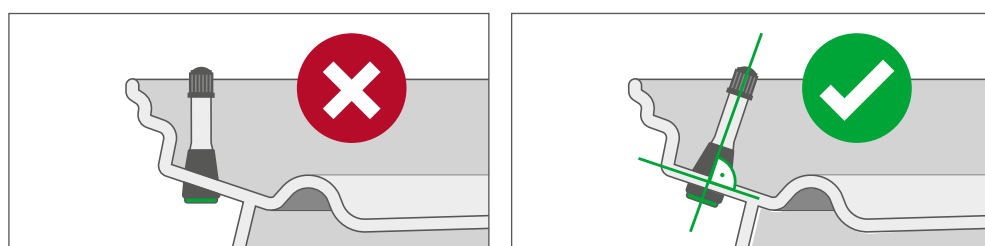

Make sure the valve is fitted correctly in the rim.

ADVANTAGES


Easy manual assembly without special tools.

NOTE


In individual cases with an unfavorable rim geometry, you may need to turn the valve slightly for proper fitting.

DISASSEMBLY

Without rim damage, without special tools

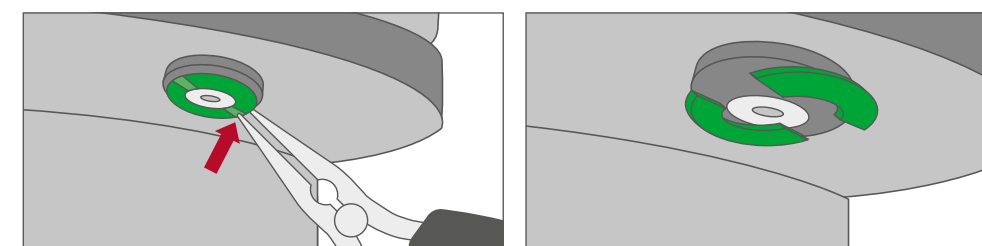

To disassemble, use tongues or a screwdriver to crack the patented thrust washer at the marked predetermined breaking point and remove.

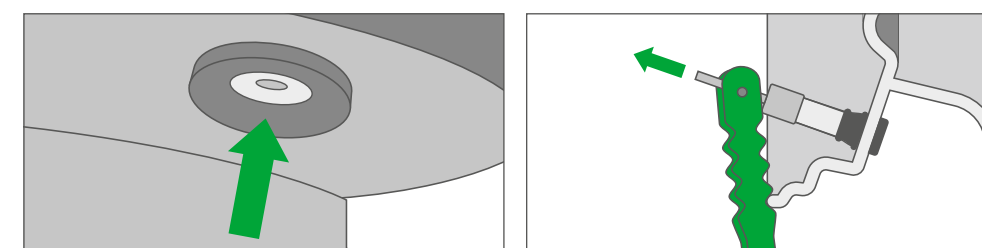

Now the valve can simply be pulled outwards through the valve hole with the ALLIGATOR standard valve mounting tool.

ADVANTAGES

- Easy disassembly without special tools.
- No damage to the rim.

TRUCK VALVES

As an OE supplier, ALLIGATOR offers suitable solutions for haulage companies, bus companies, and transport associations with a wide range of different truck valves.

CONTENT

TPMS valves	44
Rim valves	46
Tube valves	60
Valve extensions	64






TPMS VALVES 9.7

For direct tire pressure monitoring systems

- **Application:** Truck with direct TPMS
- **Design:** Partially assembled; with screw system for connecting the sensor
- **Pressure range:** Up to 14 bar / 200 psi
- **Nut Installation torque:** 9–14 Nm
- **Screw Installation torque:** 4 ± 0.5 Nm

Truck TPMS valves


Art. no.	Description	Valve length (mm)	Bending height A (mm)	Bending angle (α (°))	Qty	Vehicle type	Material	Surface	Valve caps
9-799820	TPMS 40MS	40	-	-	1		CuZn	Ni	
9-799998	TPMS 58MS	58	25.0	45	1		CuZn	Ni	
9-799926	TPMS 60MS	60	25.0	27	1		CuZn	Ni	
9-799840	TPMS 63MS	63	35.0	45	1		CuZn	-	
9-799810	TPMS 65MS	65	32.5	27	1		CuZn	Ni	
9-799830	TPMS 64MS	64	32.5	7	1		CuZn	Ni	
9-799924	TPMS 89MS	89	29.2	27	1		CuZn	Ni	

* Maximum installation torque: 12 Nm

All valves are supplied with a screw.

Spare part for truck TPMS valves (9-799xxx)

Art. no.	Description
9-031025	Screw M6, Torx TX20

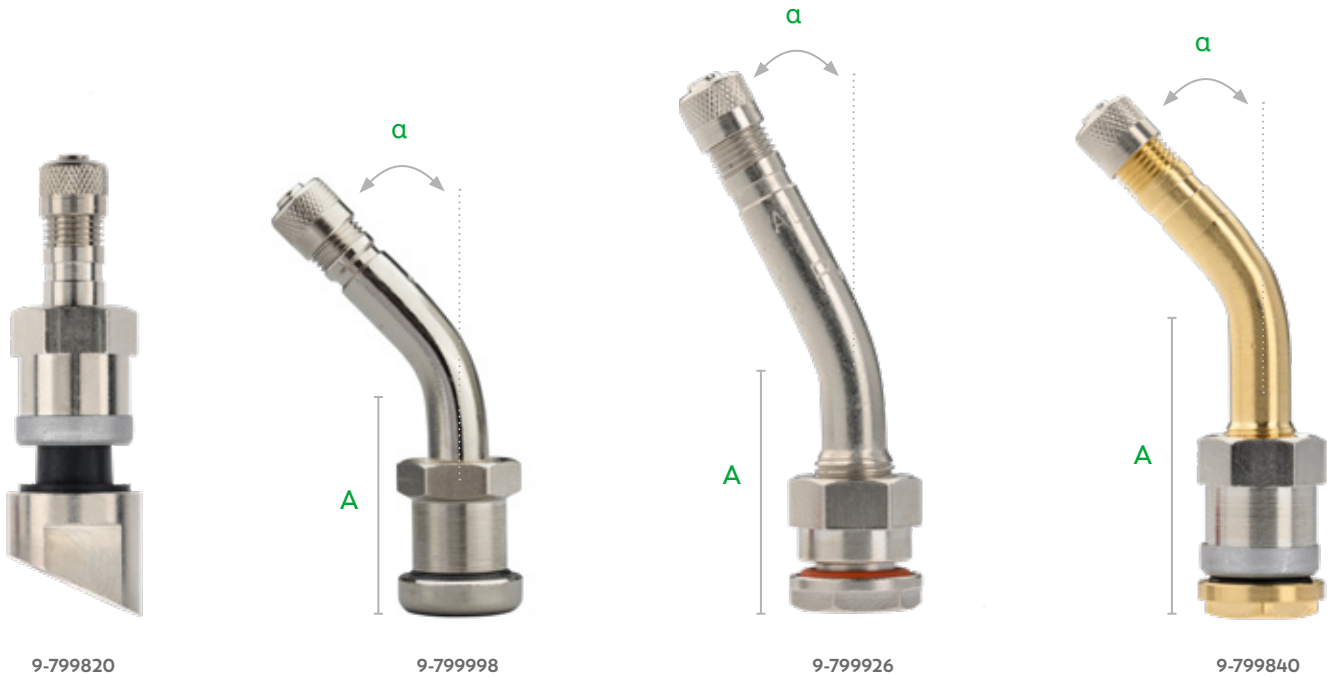

RIM VALVES

For tubeless tires

- **Application:** For tubeless truck, bus, trailer tires
- **Versions:** Straight, single, double, and triple bent brass valves
- **Pressure range:** Up to 14 bar / 200 psi
- **Fit:** Valve hole must be according to ETRTO

NOTE FOR ALUMINUM RIMS
Only use nickel-plated brass valves to avoid corrosion.

Highlights



Valve hole 9.7 mm + 0.3 mm


MS valves

- **Seal:** O-ring sealing or rubber grommet
- **Standard:** ETRTO V3.20.../V3.22.1 (European standard)
- **Rim thickness:** 3–6 mm
- **Rim:** Steel
- **Surface:** Brass / nickel-plated
- **Pressure range:** Up to 14 bar / 200 psi



41MS



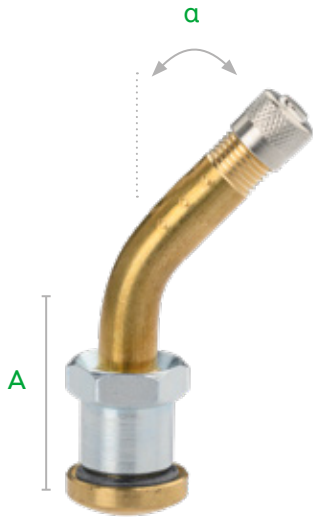



Art. no.	ETRTO no.	Valve length (mm)	Installation torque (Nm)	Vehicle type	Material	Surface	Valve base	Valve caps	
9-770503	V3.20.1eq	41	12–15		CuZn	-			★
9-773016	V3.20.1	41	12–15		CuZn	-			★



58MS










Art. no.	ETRTO no.	Valve length (mm)	Bending height A (mm)	Bending angle α (°)	Installation torque (Nm)	Vehicle type	Material	Surface	Valve caps	
9-770630		58	30	45	12–15		CuZn	-		
9-770633	V3.22.1	58	30	45	12–15		CuZn	-		★

70MS for Alcoa (extra-long thread)





















Art. no.	Valve length (mm)	Bending height A (mm)	Bending angle α (°)	Installation torque (Nm)	Vehicle type	Material	Surface	Valve base	Valve caps
9-770625	70	40	27	9-14		CuZn	Ni		
9-770704	70	40	7	9-14		CuZn	Ni		



70MS

Art. no.	Valve length (mm)	Bending height A (mm)	Bending angle α (°)	Installation torque (Nm)	Vehicle type	Material	Surface	Valve base	Valve caps
9-773553	70	30	27	12-15		CuZn	-	-	
9-773513	70	30	27	9-14		CuZn	Ni		
9-770646	70	30	27	9-14		CuZn	Ni	-	
9-770643	70	30	60	9-14		CuZn	Ni	-	

80MS - 119MS

Art. no.	ETRTO no.	Valve length (mm)	Bending height A (mm)	Bending angle α (°)	Installation torque (Nm)	Vehicle type	Material	Surface	Valve caps
9-770103	V3.20.7	80	30	27	12-15		CuZn	-	
9-770583	V3.20.4 eq	90	28	27	12-15		CuZn	-	
9-770223	V3.20.2	95	34	17,5	12-15		CuZn	-	
9-770273	V3.20.12	100	30	27	12-15		CuZn	-	
9-770283		100	57	12	12-15		CuZn	-	
9-770383		110	30	27	12-15		CuZn	-	
9-774117		115	30	12	12-15		CuZn	-	
9-770233	V3.20.6	115	30	27	12-15		CuZn	-	
9-770333	V3.20.8	119	37	12	12-15		CuZn	-	
9-770303		119	37	27	12-15		CuZn	-	
9-774213		119	30	27	12-15		CuZn	-	



Valve hole 9.7 mm + 0.4 mm











TR54x + TR55x

- **Seal:** O-ring sealing (TR54x) / rubber grommet (TR55x)
- **Standard:** TR54x / TR55x (US standard)
- **Rim thickness:** 5.5–8.4 mm
- **Rim:** Alu/Alcoa
- **Surface:** Nickel-plated
- **Pressure range:** Up to 14 bar / 200 psi
- **Installation torque:** 9–14 Nm



TR54x – straight



Art. no.	TR no.	Valve length (mm)	Vehicle type	Material	Surface	Valve caps
9-770669	542	37		CuZn	Ni	
9-770699	543	64		CuZn	Ni	
9-097755	544	78		CuZn	Ni	
9-097738	545	94		CuZn	Ni	
9-097745	546	113		CuZn	Ni	

TR543C – 45°













Art. no.	TR no.	Valve length (mm)	Bending height A (mm)	Bending angle α (°)	Vehicle type	Material	Surface	Valve caps
9-770695	543C	64	29	45		CuZn	Ni	









TR54xD – 60°







Art. no.	TR no.	Valve length (mm)	Bending height A (mm)	Bending angle α (°)	Vehicle type	Material	Surface	Valve caps
9-770696	543D	64	29	60		CuZn	Ni	
9-770686	544D	78	30	60		CuZn	Ni	
9-779677	545D	94	30	60		CuZn	Ni	
9-097747	546D	113	30	60		CuZn	Ni	
9-097752	547D	124	30	60		CuZn	Ni	

TR54xE – 75°





Art. no.	TR no.	Valve length (mm)	Bending height A (mm)	Bending angle α (°)	Vehicle type	Material	Surface	Valve caps
9-770697	543E	64	30	75		CuZn	Ni	
9-097739	545E	94	30	75		CuZn	Ni	
9-097748	546E	113	30	75		CuZn	Ni	

TR55x - straight

Art. no.	TR no.	Valve length (mm)	Vehicle type	Material	Surface	Valve caps
9-771510	552	37		CuZn	Ni	
9-771515	553	64		CuZn	Ni	







TR553C - 45°

Art. no.	TR no.	Valve length (mm)	Bending height A (mm)	Bending angle α (°)	Vehicle type	Material	Surface	Valve caps
9-771520	553C	64	29	45		CuZn	Ni	







TR55xD - 60°

Art. no.	TR no.	Valve length (mm)	Bending height A (mm)	Bending angle α (°)	Vehicle type	Material	Surface	Valve caps
9-771544	554D	78	30	60		CuZn	Ni	
9-771550	555D	94	30	60		CuZn	Ni	




TR55xE - 75°

Art. no.	TR no.	Valve length (mm)	Bending height A (mm)	Bending angle α (°)	Vehicle type	Material	Surface	Valve caps
9-771530	553E	64	30	75		CuZn	Ni	
9-771555	555E	94	30	75		CuZn	Ni	








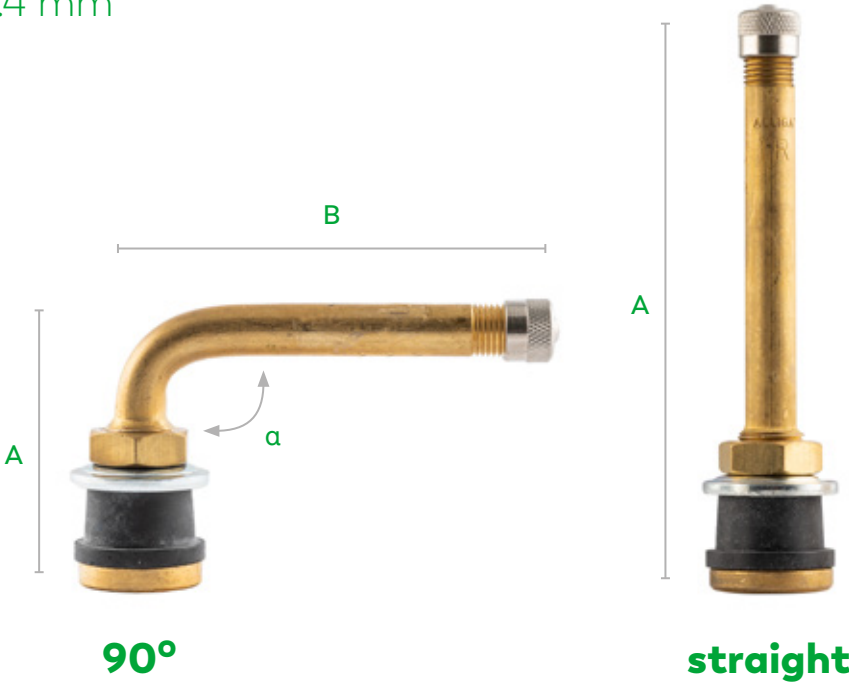


Valve hole 15.7 + 0.4 mm
TR5xx













- **Seal:** Rubber grommet
- **Standard:** ETRTO V3.21 (Europe) / TR5xx (US standard)
- **Rim thickness:** Max. 9 mm
- **Rim:** Steel
- **Surface:** Brass
- **Pressure range:** Up to 14 bar / 200 psi
- **Installation torque:** 4–6 Nm



TR57xC - 90°


Art. no.	TR no.	ETRTO no.	Valve length (mm)	Bending height A (mm)	Bending angle α (°)	Vehicle type	Material	Valve caps
9-752303	570C	V3.21.9	84	37	90		CuZn	
9-752803	571C	V3.21.10	93	37	90		CuZn	
9-753303	572C	V3.21.11	99	37	90		CuZn	
9-753803	573C	V3.21.12	114	37	90		CuZn	

TR50x/TR57x - straight


Art. no.	TR no.	ETRTO no.	Valve length (mm)	Vehicle type	Material	Valve caps
9-750603	575	V3.21.1	33		CuZn	
9-750701	575	V3.21.1	32		CuZn	
9-751103	501	V3.21.2	42		CuZn	
9-751101	501	V3.21.2	42		CuZn	
9-752603	571	V3.21.5	89		CuZn	
9-753603	573	V3.21.7	114		CuZn	

Valve hole 15.7+ 0.4 mm
MSF valves


- **Seal:** O-ring sealing
 - **Standard:** ETRTO V3.11 - V3.19 (European standard)
 - **Rim thickness** 3.5–6 mm / 7.5–9 mm
 - **Rim:** Steel
- **Surface:** Brass
 - **Pressure range:** Up to 14 bar / 200 psi
 - **Installation torque:** 25–31 Nm

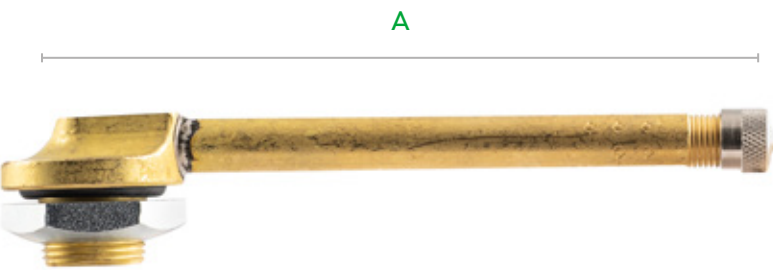

A

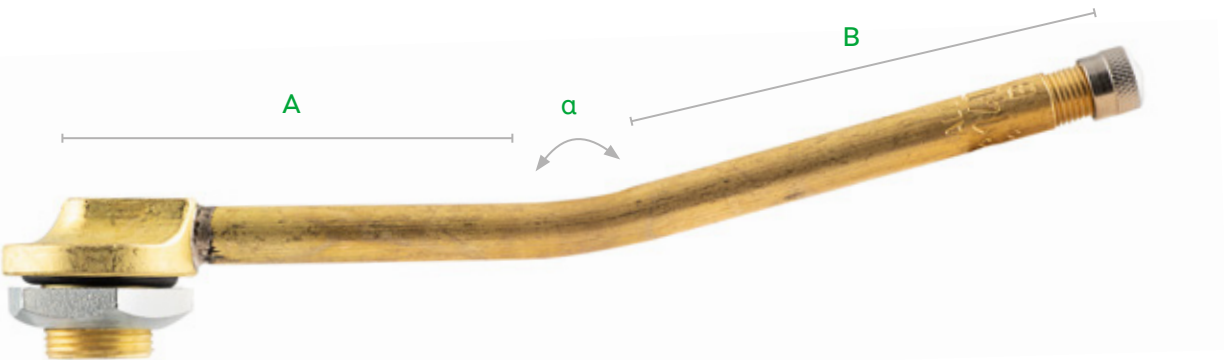



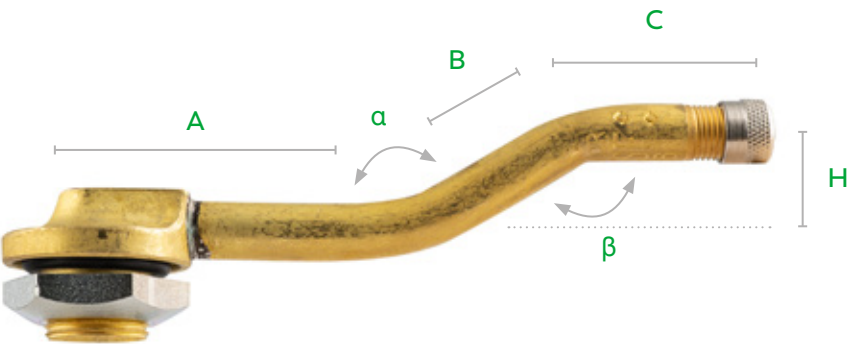







B4



C1



Form A



Art. no.	Description	ETRTO no.	Valve length (mm)	A (mm)	Vehicle type	Material	Valve caps
9-771153	40MSF	V3.12.1	40	40.0		CuZn	
9-771154	40MSF	V3.12.1	40	40.0		CuZn	
9-771163	40MSF for rim thickness 7.5–9.0 mm	V3.12.1	40	40.0		CuZn	
9-771170	65MSF	V3.12.1	65	65.0		CuZn	
9-771183	95MSF	V3.12.2	95	95.0		CuZn	







Form B4



Art. no.	Description	Valve length (mm)	A (mm)	B (mm)	Bending angle α (°)	Vehicle type	Material	Valve caps
9-771783	140MSF	140	67	73	165		CuZn	

Form C1



Art. no.	Description	ETRTO no.	Valve length (mm)	A (mm)	B (mm)	C (mm)	H (mm)	Bending angle α (°)	Bending angle β (°)	Vehicle type	Material	Valve caps
9-771243	75MSF	V3.14.1	75	25.0	25.5	24.5	14	147	147		CuZn	
9-771253	95MSF	V3.14.2	95	45.0	25.5	24.5	14	147	147		CuZn	
9-771283	110MSF	V3.16.1	110	25.0	42.0	44.5	10	167	167		CuZn	

Valve hole plug




Art. no.	Installation torque (Nm)	Vehicle type	Material
9-328501	4–6 Nm		CuZn

Valves MSF 20.5 + 0.5 mm

MSF valves

- **Seal:** O-ring sealing
 - **Standard:** ETRTO V3.11 - V3.19 (European standard)
 - **Rim thickness:** 3.5–6 mm
 - **Rim:** Steel
- **Surface:** Brass
 - **Pressure range:** Up to 14 bar / 200 psi
 - **Installation torque:** 25–31 Nm

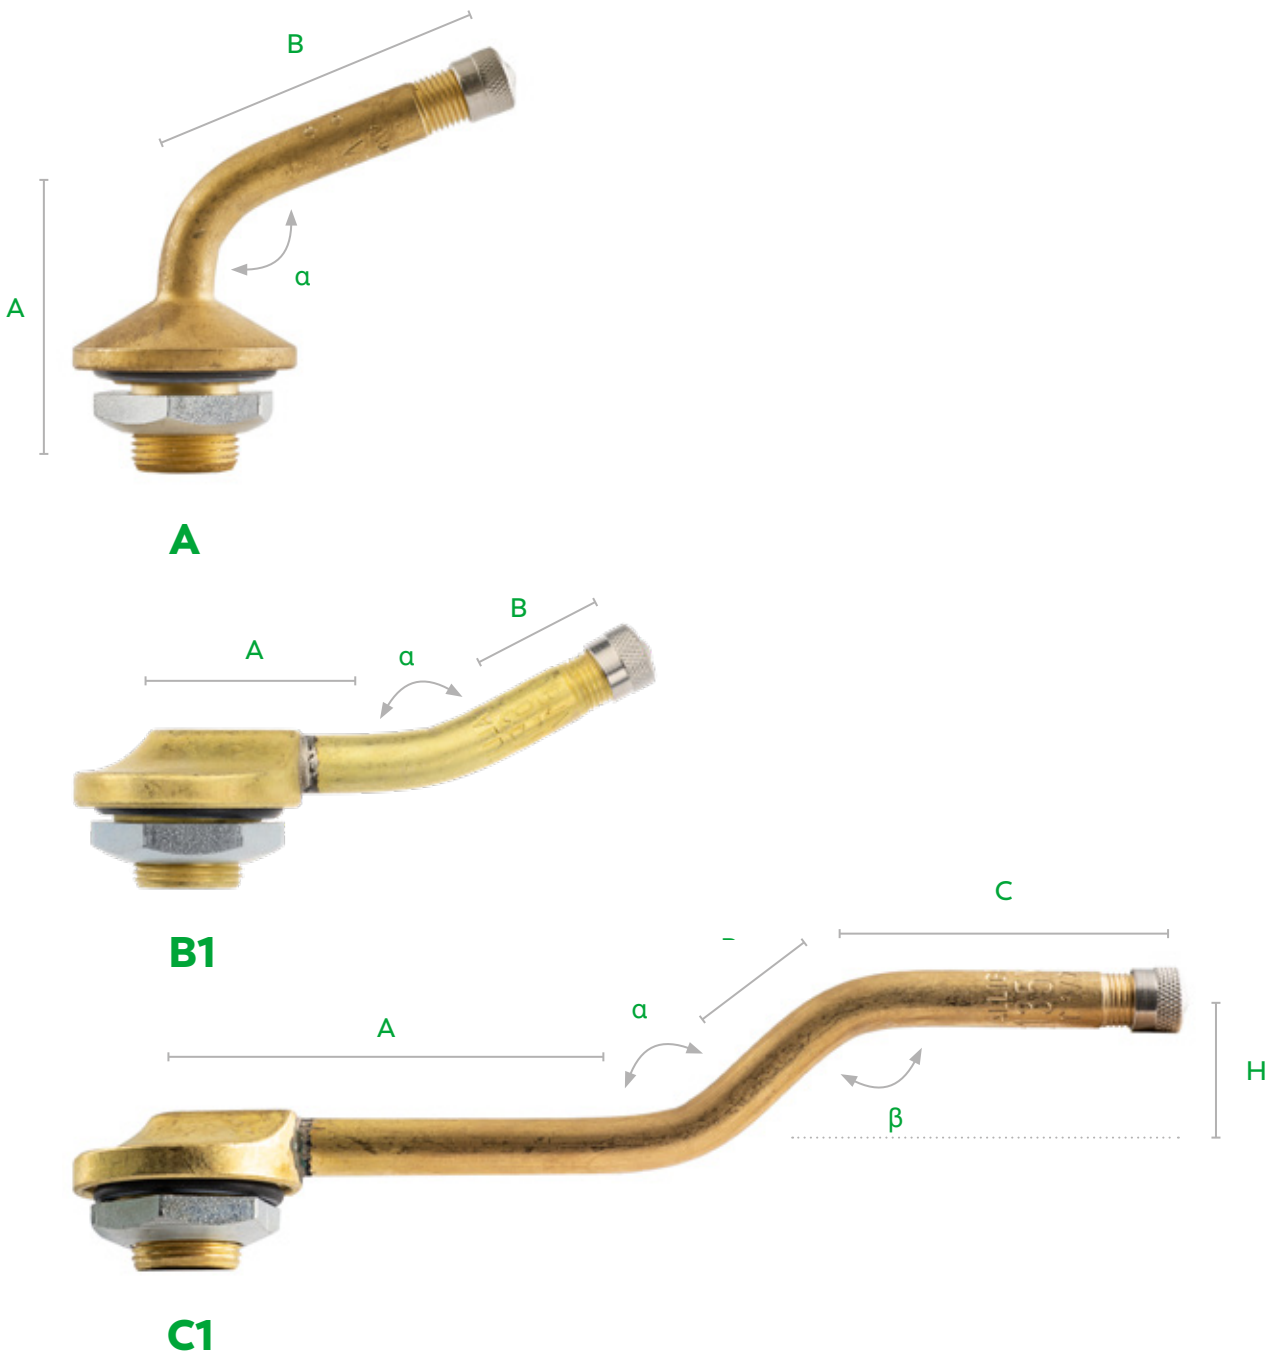

Form A

Art. no.	Description	ETRTO no.	Valve length (mm)	A (mm)	B (mm)	C (mm)	Bending angle α (°)	Rim thickness (mm)	Vehicle type	Material	Valve caps
9-770723	44.5MSF	V3.15.1	44.5	36.5	44.5	14	110	4.5–11		CuZn	
9-770733	44.5MSF	V3.15.2	44.5	26.5	44.5	11	95	3–6.5		CuZn	




Form B1

Art. no.	Description	ETRTO no.	Valve length (mm)	A (mm)	B (mm)	Bending angle α (°)	Rim thickness (mm)	Vehicle type	Material	Valve caps
9-771033	65MSF	V3.16.1	40	36	29	150	3.5–6		CuZn	
9-771043	75MSF		75	28	47	160	3.5–6		CuZn	
9-771093	160MSF		160	83	77	165	3.5–6		CuZn	




Form C1

Art. no.	Description	ETRTO no.	Valve length (mm)	A (mm)	B (mm)	C (mm)	H (mm)	Bending angle α (°)	Bending angle β (°)	Rim thickness (mm)	Vehicle type	Material	Valve caps
9-770973	135MSF	V3.18.5	135	68	29	37.5	19.5	138	138	3.5–6		CuZn	
9-770993	145MSF		145	27	35	82.5	17.5	150	150	3.5–6		CuZn	

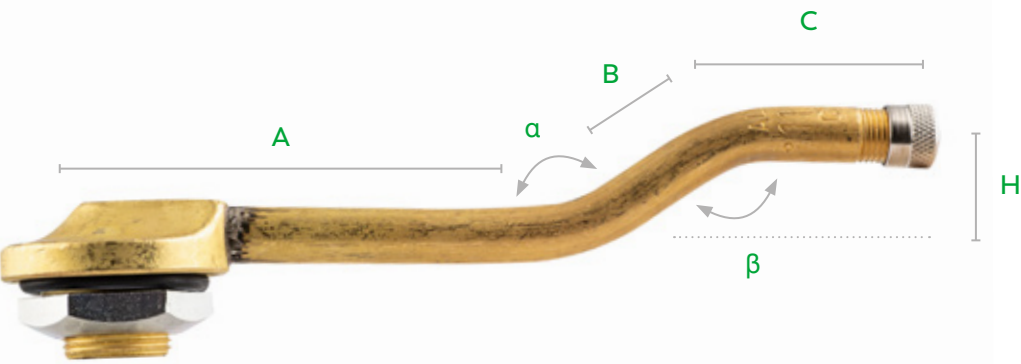


C2

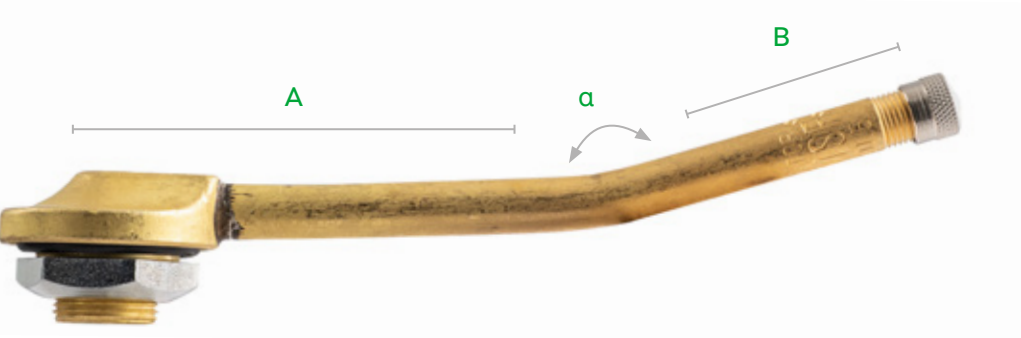

C4



D1

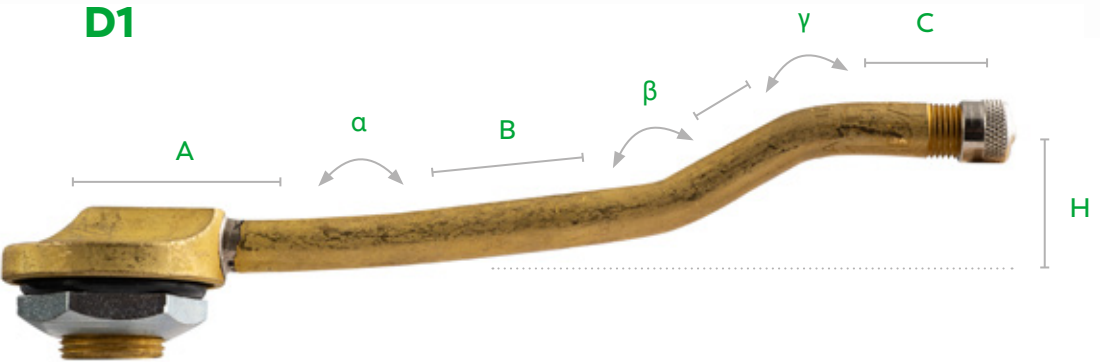

E1



Form C2

Art. no.	Description	ETRTO no.	Valve length (mm)	A (mm)	B (mm)	C (mm)	H (mm)	Bending angle α (°)	Bending angle β (°)	Rim thickness (mm)	Vehicle type	Material	Valve caps
9-770933	115MSF	V3.18.1	115	64	26	24.5	14	146	146	3.5–6		CuZn	
9-770963	130MSF	V3.18.2	130	81	26	24.5	14.5	146	146	3.5–6		CuZn	



Form C4

Art. no.	Description	Valve length (mm)	A (mm)	B (mm)	C (mm)	Bending angle α (°)	Bending angle β (°)	Field thickness (mm)	Vehicle type	Material	Valve caps
9-770943	120MSF	120	25	45	50	5	15	3.5–6		CuZn	



Form D1

Art. no.	Description	ETRTO no.	Valve length (mm)	Form	A (mm)	B (mm)	Bending angle α (°)	Rim thickness (mm)	Vehicle type	Material	Valve caps
9-770863	130MSF	V3.17.1	130	D1	98.5	31.5	188	3.5–6		CuZn	
9-770883	147MSF	V3.17.2	147	D1	116	31.5	188	3.5–6		CuZn	



Form E1


Art. no.	Description	ETRTO no.	Valve length (mm)	A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	Bending angle α (°)	Bending angle β (°)	Bending angle γ (°)	Rim thickness (mm)	Vehicle type	Material	Valve caps
9-770753	125MSF	V3.19.2	125	33.5	42	25	24.5	20	173	152	145	3.5–6		CuZn	
9-770773	140MSF	V3.19.1	140	33.5	58	24	24.5	21.5	173	154	147	3.5–6		CuZn	

TUBE VALVES

For tires with tube (tube type)

- **Application:** Truck, bus, trailer tires with tube
- **Versions:** Single, double, and triple bent brass valves
- **Pressure range:** Up tp 10.5 bar / 150 psi
- **Fit:** Valve hole must comply with ETRTO

For 8V1 thread

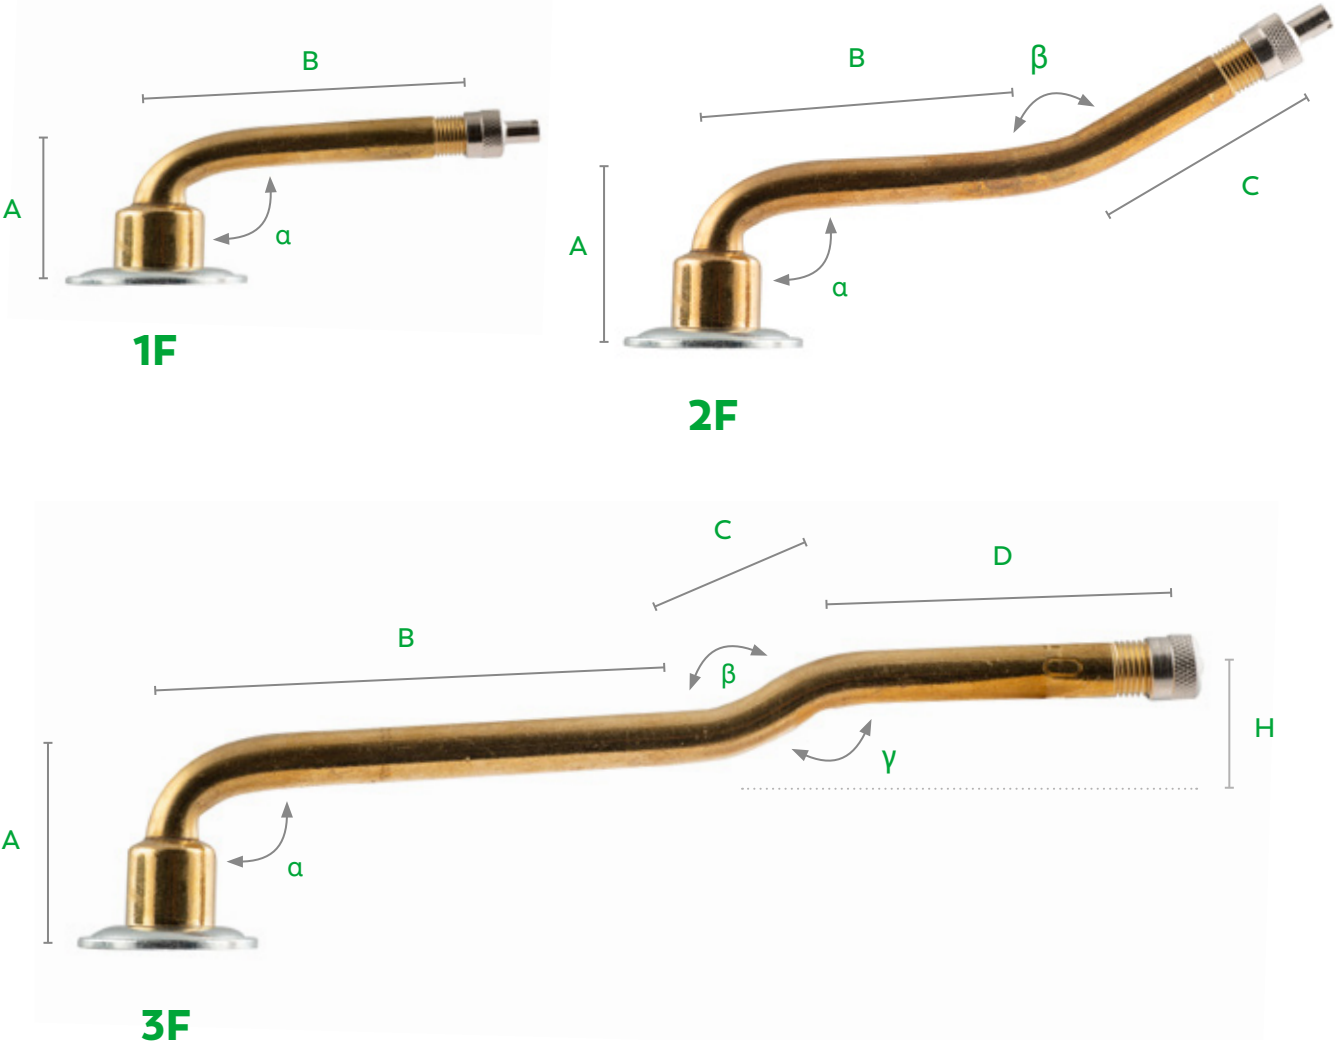

Form 1F

8V1 thread



Art. no.	TR no.	ETRTO no.	A (mm)	B (mm)	Bending angle α (°)	Vehicle type	Material	Valve caps
9-730173		V3.02.5	23.5	47.5	90		CuZn	
9-730163		V3.02.2	25.5	43.0	120		CuZn	
9-730623		0	25.5	56.5	95		CuZn	
9-730603		V3.02.19	23.5	60.0	94		CuZn	
9-730613		V3.02.3	36.0	44.5	95		CuZn	
9-731103			23.0	70.0	94		CuZn	
9-731601	75E		23.0	75.0	94		CuZn	
9-731603	75E		23.0	75.0	94		CuZn	
9-732301			23.5	79.5	90		CuZn	
9-732303	76EQ		23.5	84.5	94		CuZn	
9-733101	177EQ		23.0	95.0	94		CuZn	
9-733103	177EQ		23.0	95.0	94		CuZn	
9-734101	77E		23.0	105.0	94		CuZn	
9-734103			23.0	105.0	94		CuZn	
9-735101		V3.02.10	23.5	115.0	94		CuZn	
9-735103	175	V3.02.10	23.5	115.0	94		CuZn	
9-735601	78E		23.0	127.0	94		CuZn	
9-735603	78EQ		23.0	127.0	94		CuZn	
9-736101	178	V3.02.12	23.5	132.0	94		CuZn	
9-736103	178	V3.02.12	23.5	132.0	94		CuZn	
9-736601	179	V3.02.14	23.5	138.5	94		CuZn	
9-737613		V3.02.17	23.5	156.5	94		CuZn	

Spare part for tube valve 8V1 (9-73xxxx)



Art.Nr.	Description	ETRTO no.	Material
9-030753	Sealing washer	V9.05.1	Rubber



Form 2F

8V1 thread



Art. no.	TR no.	ETRTO no.	A (mm)	B (mm)	C (mm)	Bending angle α (°)	Bending angle β (°)	Vehicle type	Material	Valve caps
9-731701	7		23.0	28.0	47.0	94	164		CuZn	
9-731723			23.0	28.0	47.0	94	164		CuZn	
9-732213		V3.04.8	23.5	38.5	43.0	90	167		CuZn	
9-732253		V3.04.15	23.5	42.0	38.5	90	120		CuZn	
9-733203		V3.04.23	23.0	48.0	47.0	94	164		CuZn	
9-733723		V3.04.10	23.5	47.0	53.0	90	154		CuZn	
9-734203		V3.04.24	23.0	58.0	47.0	94	164		CuZn	
9-735203		V3.04.18	23.0	68.0	47.0	94	164		CuZn	
9-735703	78EQ	V3.04.25	23.0	80.0	47.0	94	164		CuZn	
9-736223		V3.04.6	23.0	86.0	47.5	90	153		CuZn	
9-736703	179EQ	V3.04.21	23.0	83.0	57.0	94	154		CuZn	


Form 3F

8V1 thread



Art. no.	TR no.	ETRTO no.	A (mm)	B (mm)	C (mm)	D (mm)	H (mm)	Bending angle α (°)	Bending angle β (°)	Bending angle γ (°)	Vehicle type	Material	Valve caps
9-733303		V3.06.13	23.0	40.0	13.0	40.0	7.0	94	153	153		CuZn	
9-733813		V3.06.2	23.5	44.5	12.0	37.5	17.0	90	125	125		CuZn	
9-734303		V3.06.14	23.0	50.0	13.0	40.0	7.0	94	153	153		CuZn	
9-735303		V3.06.15	23.0	60.0	13.0	40.0	7.0	94	153	153		CuZn	
9-735801	78E	V3.06.16	23.0	62.0	13.0	50.0	7.0	94	153	153		CuZn	
9-735803	78E	V3.06.16	23.0	62.0	13.0	50.0	7.0	94	153	153		CuZn	
9-736343		V3.06.5	23.5	62.5	19.5	49.0	17.0	90	139	139		CuZn	
9-736353		V3.06.8	27.5	61.5	14.5	50.5	7.5	94	153	153		CuZn	
9-736803	179	V3.06.17	23.0	75.0	13.0	50.0	7.0	94	153	153		CuZn	
9-736833		V3.06.6	23.0	79.5	19.5	37.5	17.0	90	139	139		CuZn	

For 12V1 thread

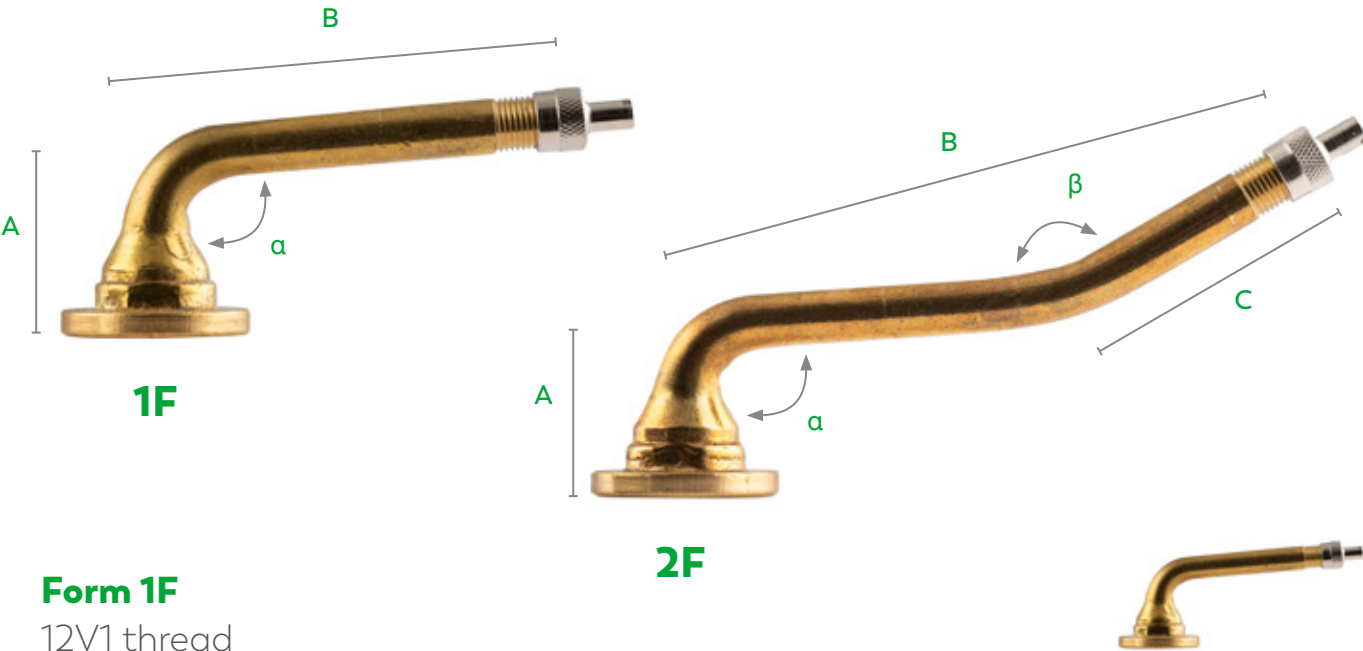

Form 1F

12V1 thread

Art. no.	TR no.	A (mm)	B (mm)	Bending angle α (°)	Vehicle type	Material	Valve caps
9-710101	1227A	24.0	50.0	86		CuZn	
9-710601	1274A	24.0	60.0	86		CuZn	
9-711601	1075A	24.0	75.0	86		CuZn	
9-712601	1177A	24.0	95.0	86		CuZn	
9-701601	75	32.0	75.0	86		CuZn	
9-703101	177	32.0	95.0	86		CuZn	

Form 2F

for 12V1 thread



Art. no.	TR no.	A (mm)	B (mm)	C (mm)	Bending angle α (°)	Bending angle β (°)	Vehicle type	Material	Valve caps
9-711701	1075A	24.0	0	38.0	86	26		CuZn	
9-712701	1177A	24.0	90.0	38.0	86	26		CuZn	
9-713201	1077A	24.0	105.0	38.0	86	26		CuZn	

Spare part for tube valve 12V1 (9-71xxxx)

Art.Nr.	Description	ETRTO no.	Material
9-030754	Sealing washer	V9.05.1	Rubber

VALVE EXTENSIONS

Tool for hard to reach valves

- **Application:** Twin truck tires
- **Design:** Rigid and flexible
- **Fit:** Length depends on the wheel conditions (rim-center distance)
- **Suitable for:** All standard valve sizes (8V1); do not use with rubber valves

USAGE INFORMATION

- Select suitable length.
- Valve extensions remain permanently screwed onto the valve.
- Valve extensions not suitable for snap-in valves.
- Leave the valve core in the valve.

Valve extension variants


Overview



	Highly flexible	Flexible	Rigid
Material	With fabric	With steel sheath	Plastic or brass
Flexibility	100%	95%	0%
Extension insert	sealing	sealing	not sealing
Pressure range	up to 20 bar / 290 psi	up to 20 bar / 290 psi	unpressurized
Compressive strength/burst pressure	70 bar / 1015 psi	120 bar / 1740 psi	150 bar / 2175 psi
Professional assembly	with fixed clamp	with fixed clamp	can be used without holder
Breakage resistance	very high	very high	low

Support collar

The support for rigid valve extensions

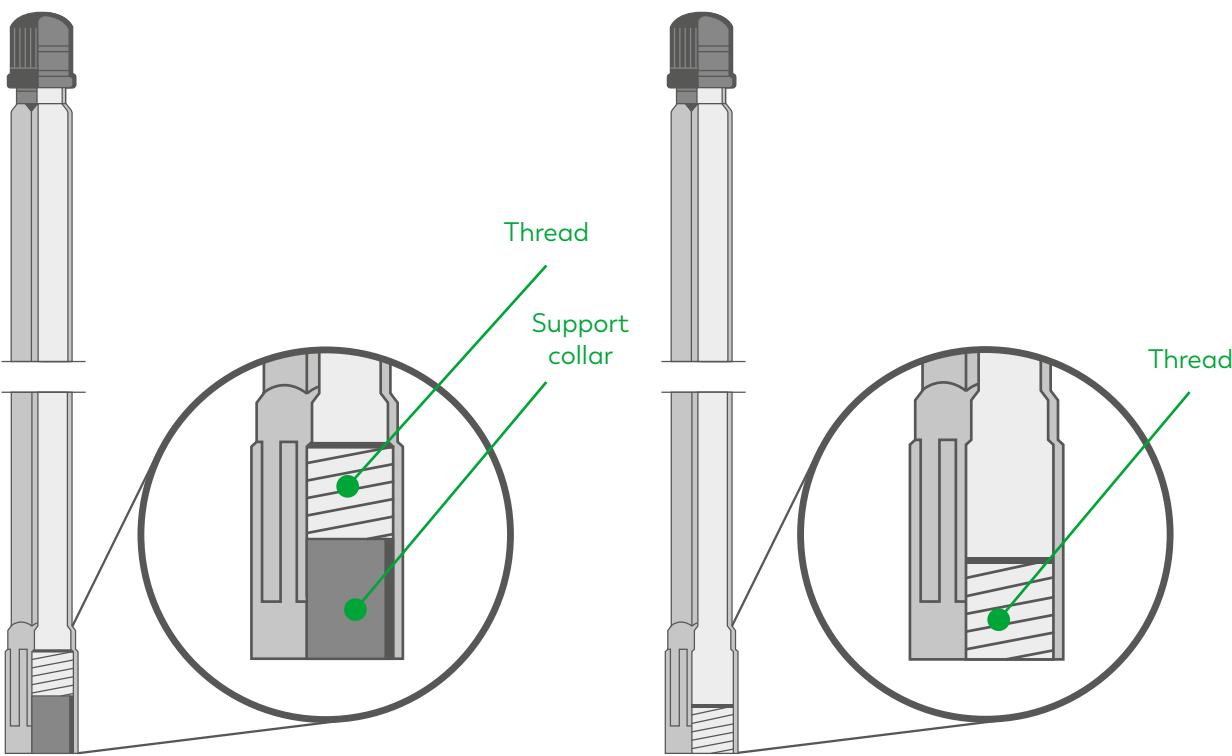

with support collar

without support collar


ADVANTAGES OF THE SUPPORT COLLAR

- More stability
- Higher break resistance
- Easier assembly due to guiding of the support collar



Plastic

Rigid

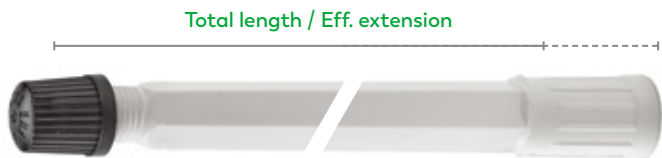


With support collar

Art. no.	ETRTO no.	Total length (mm)	Effective extension (mm)	Vehicle type	Material	Valve caps
9-381504	V9.16.1	71	53		Plastic	
9-381805	V9.16.2	95	78		Plastic	
9-382604	V9.16.3	115	98		Plastic	
9-382705	V9.16.4	125	108		Plastic	
9-382804	V9.16.5	150	132		Plastic	
9-382904	V9.16.6	170	153		Plastic	
9-383005	V9.16.7	180	163		Plastic	

Without support collar

Art. no.	ETRTO no.	Total length (mm)	Effective extension (mm)	Vehicle type	Material	Valve caps
9-382405	V9.16.2	85	78		Plastic	
9-382435	V9.16.3	105	98		Plastic	
9-382465	V9.16.4	115	108		Plastic	

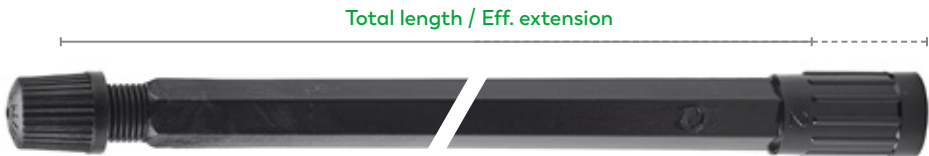


With support collar

Art. no.	ETRTO no.	Total length (mm)	Effective extension (mm)	Vehicle type	Material	Valve caps
9-382607	V9.16.3	115	98		Plastic	
9-382807	V9.16.5	150	133		Plastic	
9-382907	V9.16.6	170	153		Plastic	


Brass

Rigid

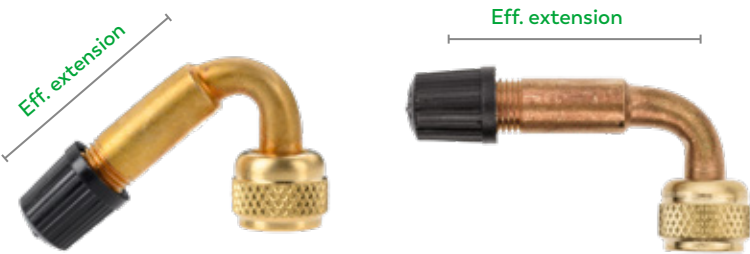

Bended

Art. no.	Total length (mm)	Effective extension (mm)	Bending angle (°)	Bending height (mm)	Vehicle type	Material	Valve caps
9-330935	48	29	45	21.0		CuZn	
9-330903	55	35	90	20.5		CuZn	
9-330905	55	35	90	20.5		CuZn	

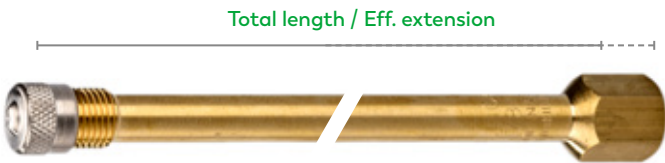

Without support collar

Art. no.	Total length (mm)	Effective extension (mm)	Vehicle type	Material	Valve caps
9-331103	30	24		CuZn	
9-331203	40	34		CuZn	
9-331403	60	54		CuZn	
9-331703	84	78		CuZn	
9-332003	100	94		CuZn	



With support collar


Art. no.	Total length (mm)	Effective extension (mm)	Vehicle type	Material	Valve caps
9-331303	41.5	27		CuZn	
9-331353	58	41		CuZn	
9-332603	115	100		CuZn	
9-332703	124.5	110		CuZn	
9-332883	142	127		CuZn	
9-332903	178	153		CuZn	

Rubber
Highly flexible

Rubber



Art. no.	Total length (mm)	Effective extension (mm)	Pressure range (bar/psi)	Vehicle type	Material	Valve caps
9-370008	75	69	20 / 290		Rubber	
9-370018	85	79	20 / 290		Rubber	
9-370028	105	99	20 / 290		Rubber	
9-370038	115	109	20 / 290		Rubber	
9-370168	125	119	20 / 290		Rubber	
9-370188	140	134	20 / 290		Rubber	
9-370198	160	154	20 / 290		Rubber	
9-370228	180	174	20 / 290		Rubber	
9-370248	210	204	20 / 290		Rubber	
9-370288	270	264	20 / 290		Rubber	
9-370328	335	329	20 / 290		Rubber	
9-370388	370	364	20 / 290		Rubber	
9-370408	430	424	20 / 290		Rubber	
9-370428	475	469	20 / 290		Rubber	
9-370438	695	689	20 / 290		Rubber	
9-370440	1500	1.494	20 / 290		Rubber	

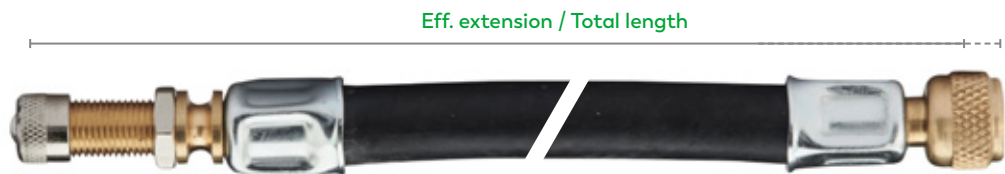

Rubber with hex nut

Art. no.	Total length (mm)	Effective extension (mm)	Vehicle type	Material	Valve caps
9-370013	85	79		Rubber	
9-370023	105	99		Rubber	
9-370163	125	119		Rubber	
9-370183	140	134		Rubber	
9-370223	180	174		Rubber	
9-370253	210	204		Rubber	



90° Angle

Art. no.	Effective extension (mm)	Hose length (mm)	Bending angle (°)	Bending height (mm)	Pressure range (bar/psi)	Vehicle type	Material	Valve caps
9-378578	135	103	90	14	20 / 290		Rubber	
9-378638	205	173	90	14	20 / 290		Rubber	
9-378688	275	243	90	14	20 / 290		Rubber	
9-378798	355	323	90	14	20 / 290		Rubber	
9-378868	455	423	90	14	20 / 290		Rubber	



2x 90° angle

Art. no.	Effective extension (mm)	Hose length (mm)	Bending angle (°)	Vehicle type	Material	Valve caps
9-336507	360	340	2 x 90		Rubber	


Spare part



Art. no.	Description	TR no.	Wrench size	Vehicle type	Material	Surface
9-320000	Hexagon nut	LN3EQ	10		CuZn	Ni


Rubber with steel braid

Flexible

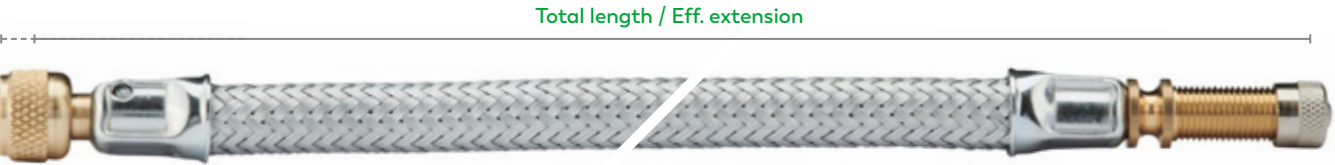


Rubber with steel braid

Art. no.	Total length (mm)	Effective extension (mm)	Pressure range (bar/psi)	Vehicle type	Material	Valve caps
9-333008	125	119	20 / 290		Rubber / Fe	
9-333068	130	124	20 / 290		Rubber / Fe	
9-333108	150	144	20 / 290		Rubber / Fe	
9-371198	160	154	20 / 290		Rubber / Fe	
9-333208	175	169	20 / 290		Rubber / Fe	
9-333268	180	174	20 / 290		Rubber / Fe	
9-333308	200	194	20 / 290		Rubber / Fe	
9-333328	210	204	20 / 290		Rubber / Fe	
9-333408	250	244	20 / 290		Rubber / Fe	
9-333508	300	294	20 / 290		Rubber / Fe	
9-333608	350	344	20 / 290		Rubber / Fe	
9-333708	400	394	20 / 290		Rubber / Fe	
9-333808	450	444	20 / 290		Rubber / Fe	
9-333908	500	494	20 / 290		Rubber / Fe	

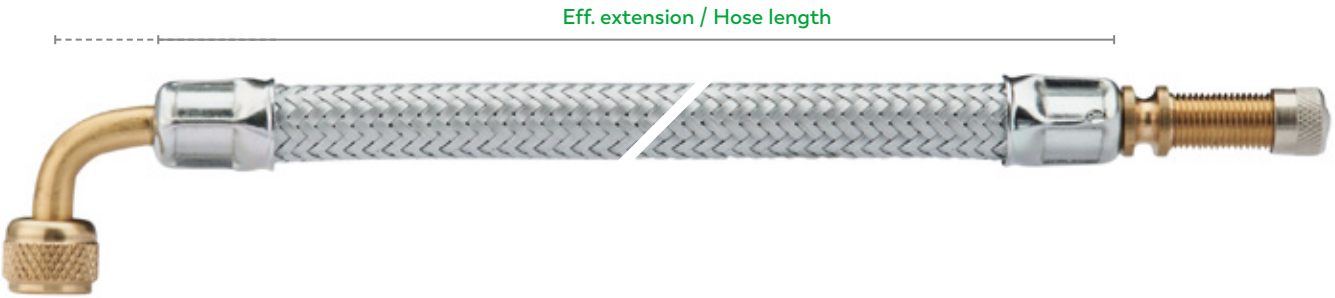


90° Angle

Art. no.	Effective extension (mm)	Hose length (mm)	Bending angle (°)	Bending height (mm)	Pressure range (bar/psi)	Vehicle type	Material	Valve caps
9-336108	150	113	90	14	20 / 290		Rubber / Fe	
9-336408	250	213	90	14	20 / 290		Rubber / Fe	
9-336508	300	263	90	14	20 / 290		Rubber / Fe	
9-336518	500	463	90	14	20 / 290		Rubber / Fe	
9-336509	900	863	90	14	20 / 290		Rubber / Fe	

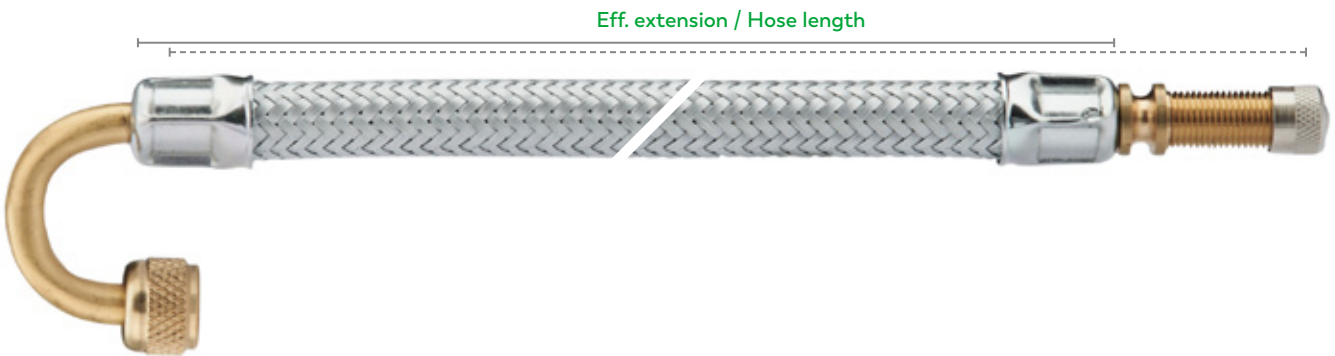


180° Angle

Art. no.	Effective extension (mm)	Hose length (mm)	Bending angle (°)	Pressure range (bar/psi)	Vehicle type	Material	Valve caps
9-338258	270	245	180°	20 / 290		Rubber / Fe	

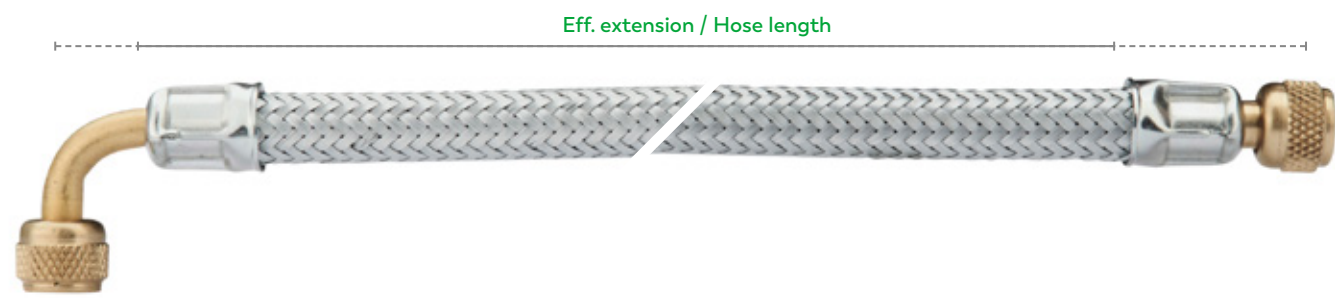





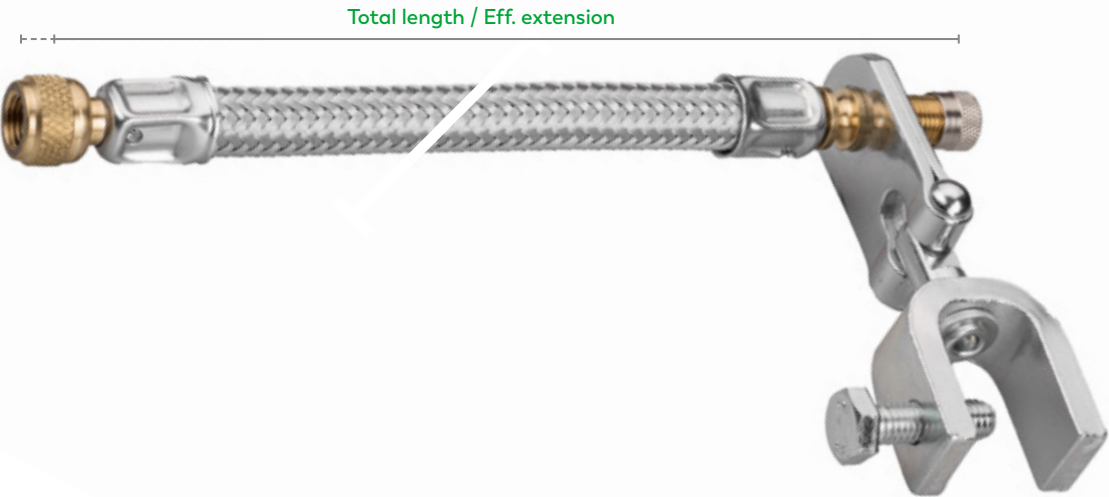







90° angle + 2x valve connectors

Art. no.	Effective extension (mm)	Hose length (mm)	Bending angle (°)	Bending height (mm)	Pressure range (bar/psi)	Material
9-331468	274.5	250	90	15	20 / 290	Rubber / Fe








Rubber with steel braid and joint holder

Art. no.	Total length (mm)	Effective extension (mm)	Pressure range (bar/psi)	Vehicle type	Material	Valve caps
9-333006	125	119	20 / 290		Rubber / Fe	
9-333106	150	144	20 / 290		Rubber / Fe	
9-333206	175	169	20 / 290		Rubber / Fe	
9-333306	200	194	20 / 290		Rubber / Fe	
9-333406	250	244	20 / 290		Rubber / Fe	
9-333506	300	294	20 / 290		Rubber / Fe	



Spare parts & accessories for (highly) flexible valve extensions

Art. no.	Description	TR no.	Wrench size	Vehicle type	Material	Surface
9-377700	Holder				Fe	Zn
9-377702	Holder for aluminum wheels				Fe	Zn
9-377710	Holder double				Fe	Zn
9-337501	Joint holder				Fe	Zn
9-320000	Hexagon nut	LN3EQ	10		CuZn	Ni

ALLIGATOR VALVES
ALWAYS THE
RIGHT CHOICE!





AGRICULTURAL VALVES

ALLIGATOR's product range includes air/water valves specially designed for the agricultural sector. They are used to fill tractor tires with water and air, safely and reliably.

CONTENT

Air/water valves 76

Accessories for agricultural valves 78

Water filling and emptying devices 79

AIR/WATER VALVES

For filling tires with water to increase traction

- **Application:** Tractor
- **Properties:** Wide valve passage allowing large tires to be filled quickly
- **Valve hole:** 15.7 + 0.4 mm
- **Installation torque:** 5–8 Nm



Tube base valve

Art. no.	Length (mm)	Vehicle type	Material	Surface	Valve caps
9-542503	54		CuZn	-	

Tube valve

Art. no.	TR no.	ETRTO no.	Length (mm)	Vehicle type	Material	Surface	Valve caps
9-534043	218A	V4.01.1	47		CuZn	-	

Snap-in agricultural valve


Art. no.	Length (mm)	Vehicle type	Material	Valve caps
9-594012	55		CuZn	




9-544501



9-544503
9-544543

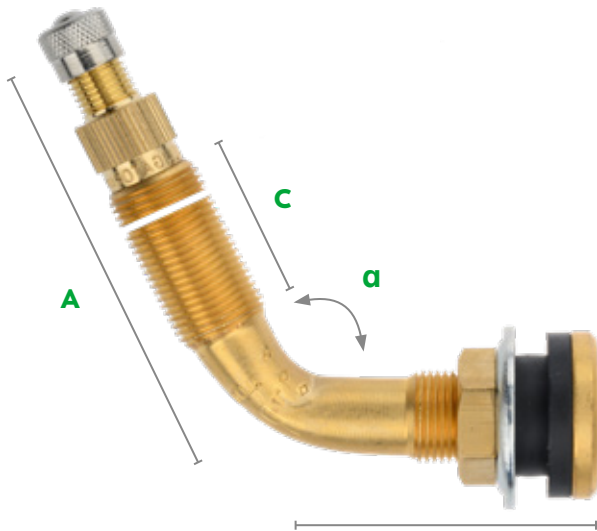

9-545503
9-547503

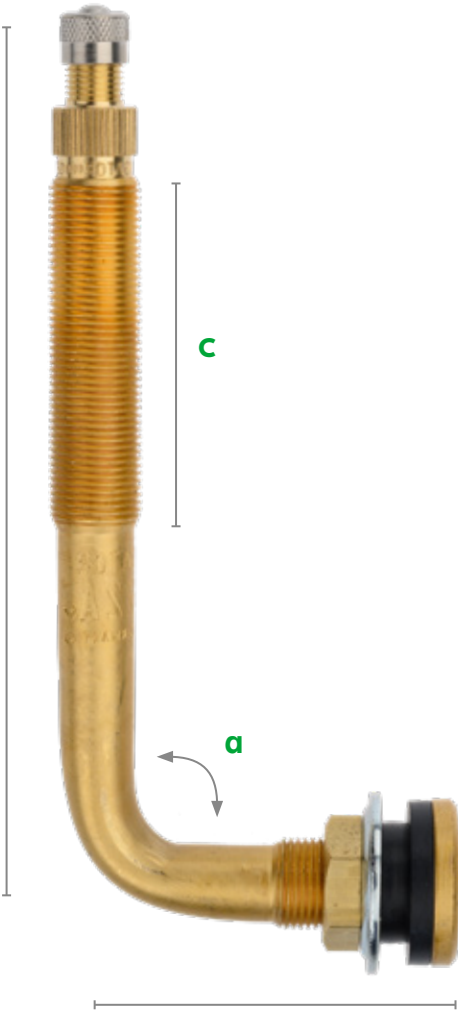

9-546503

Tubeless valves

Art. no.	TR no.	ETRTO no.	A (mm)	B (mm)	Bending angle a (°)	C (mm)	Vehicle type	Material	Valve caps
9-544543	618Aeq		40					CuZn	
9-544503	618A	V5.01.1	51					CuZn	
9-544501	618A	V5.01.1	51					CuZn	
9-547503	623A	V5.02.3	57	42.5	65	36.5		CuZn	
9-545503	621A	V5.02.1	75	42.5	65	55.0		CuZn	
9-546503	622A	V5.02.2	115	48.0	90	94.5		CuZn	

ACCESSORIES

For agricultural valves



9-324703 9-324701 9-324603

Valve core pieces

Art. no.	TR no.	ETRTO no.	Length (mm)	Vehicle type	Material	Surface	Valve caps
9-324703	CH3	V4.02.1	35.5		CuZn	-	
9-324701	CH3	V4.02.1	35.5		CuZn	-	
9-324603	CH1		40.0		CuZn	Ni	



9-322200 9-322215

Rim nuts

Art. no.	TR no.	ETRTO no.	Thread	Vehicle type	Material	Surface
9-322200	LN10	V9.14.1	12V1		CuZn	-
9-322215	LN10	V9.14.1eq	12V1		Plastic	-

WATER FILLING AND
EMPTYING DEVICES

For easy filling of tractor tires



9-339182 9-339101



9-339181



9-339051
9-339251
9-339002
9-033365

9-339091


Water filling and emptying devices

Art. no.	Description	Vehicle type	Material	Surface
9-339182	Combined water filling and emptying devices (Hanauer Mouse)		CuZn	Ni
9-339181	Combined water filling and emptying devices (Waterboy G3/4)		CuZn	Ni
9-339101	Air/water fittings		CuZn	Ni
9-339091	Adapter set G3/4 + 12V1		CuZn	Ni
9-033365	Hose coupling 1/3		CuZn	-
9-339002	ZW air/water adapter		CuZn	Ni
9-339051	Adapter		CuZn	Ni
9-339251	Adapter		CuZn	-


ASSEMBLY INSTRUCTION

WATER FILL- & EMPTYING DEVICE


Filling the driving wheels

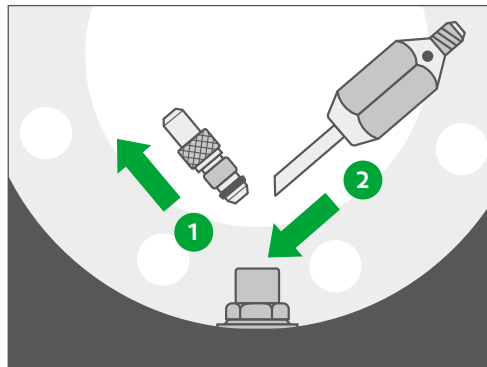


- Jack up the driving wheel.
- Unscrew valve core housing 1 from the rim valve.
- Allow compressed air to escape.
- Unscrew water filling valve 2.

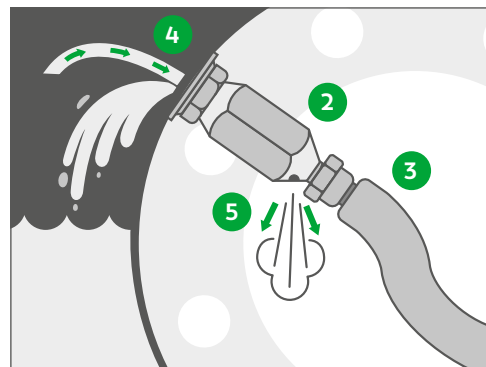

- Set driving wheel to position 2.
- Connect water hose 3 and fill with water.
- Air escapes from the tires through the tube 4 and the opening 5.
- The tire is starting filled with water when the water flows from the opening 5.

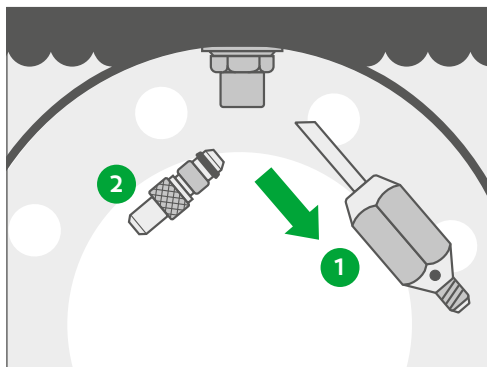


- Set driving wheel to position 3.
- Unscrew water filling valve 2.
- Screw in valve core housing 1.

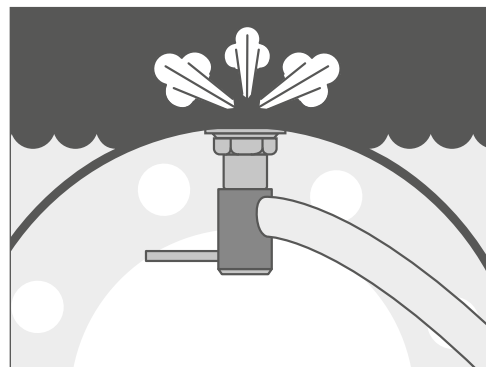


- Fill tires with compressed air according to instructions.
- Store water filling valve in a safe place.


Emptying the driving wheels

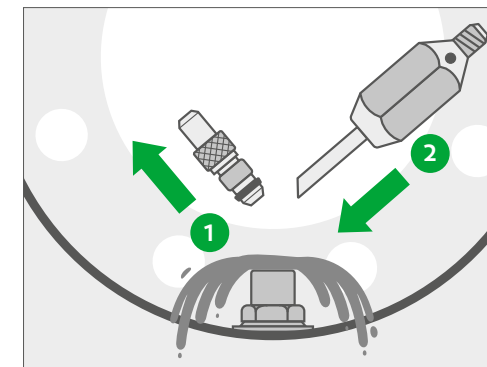


- Jack up the driving wheel.
- Unscrew valve core housing 1 from the rim valve.
- Drain water.
- Unscrew water filling valve 2.

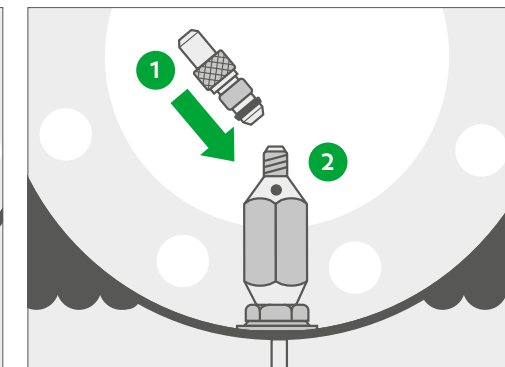

- Screw valve core housing 1 into water filling valve 1.

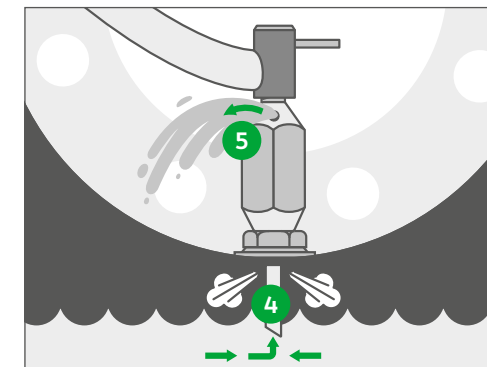

- Fill with compressed air.
- Air from tires escapes through tube 4 and opening 5.

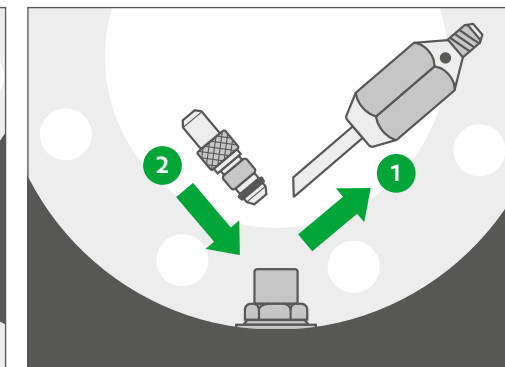

- Unscrew water filling valve 2.
- Screw in valve core housing 1.
- Fill tires with compressed air according to instructions.
- Store water filling valve in a safe place.



EARTHMOVER VALVES

For earthmoving equipment, heavy-duty trucks, high-capacity dump trucks, dumpers, loaders, conveyors, graders, and cranes.

CONTENT

Large bore valves	84
Large bore valves with base	86
Large bore valve extensions	88
Accessories	91




LARGE BORE VALVES

Without rim base

- **Application:** For rim valves on tubeless EM tires
- **Design:** Without base
- **Valve hole:** 20.5 + 0.5 mm



9-820061

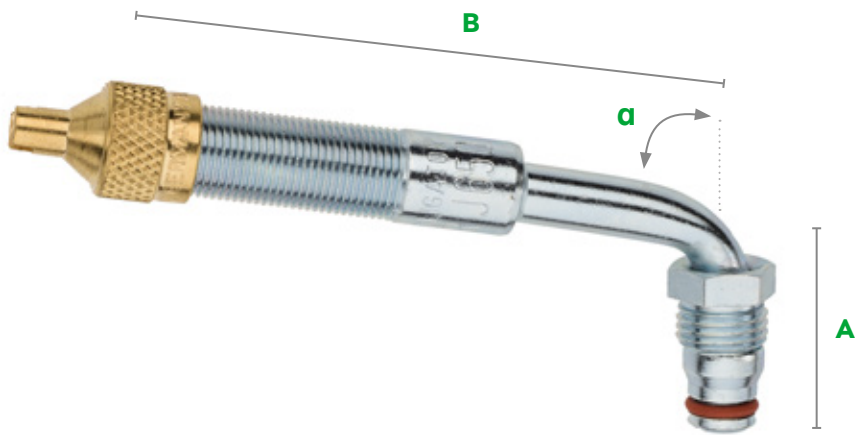


9-820161

Large bore valves

Without protective tube

Art. no.	TR no.	ETRTO no.	A (mm)	B (mm)	Bending angle a (°)	Qty	Vehicle type	Material	Surface	Valve caps
9-820061	J670-02	V5.03.1	41			10		CuZn	-	
9-820146	J653-02		27	64	80	10		CuZn	Ni	
9-820141	J4000-2 1/2		27	64	90	10		CuZn	Ni	
9-820166	J654-02		27	80	60			CuZn	Ni	
9-820176	J655-02		27	80	74	10		CuZn	Ni	
9-820161	J650-02	V5.04.1	27	80	80	10		CuZn	Ni	
9-820171	J4000-3 1/8		27	80	90			CuZn	Ni	
9-820191	J659-02		48	89	90			CuZn	Ni	

Tightening torque: 8–9 Nm

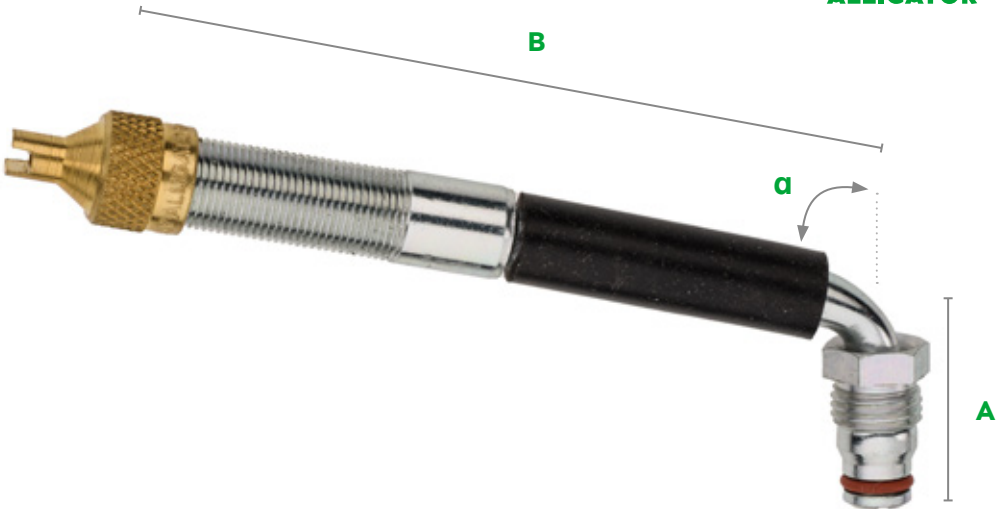

9-820226

Large bore valves

With protective tube

Art. no.	TR no.	ETRTO no.	A (mm)	B (mm)	Bending angle a (°)	Vehicle type	Material	Surface	Valve caps
9-820201	J657-02		27	100	80		CuZn	Ni	
9-820226	J4000-4 1/2		27	115	90		CuZn	Ni	
9-820236	J651-02	V5.04.2	32	119	90		CuZn	Ni	
9-820266	J658-02		27	140	80		CuZn	Ni	
9-820261	J652-02		27	140	86		CuZn	Ni	
9-820286 *	J4000-6		27	153	90		CuZn	Ni	
9-820341 *	J4000-71/2		27	191	90		CuZn	Ni	
9-820381 *	J4000-83/4		27	222	90		CuZn	Ni	

* with two hex nuts

Tightening torque: 8–9 Nm



EM valve spud

Art. no.	TR no.	ETRTO no.	A (mm)	Qty	Vehicle type	Material	Surface
9-329201	SP2	V5.10.1	17	10		CuZn	-

Tightening torque: 20–23 Nm

Spare part


Art. no.	Description	Vehicle type	Material
9-030739	Rubber grommet		VMQ70







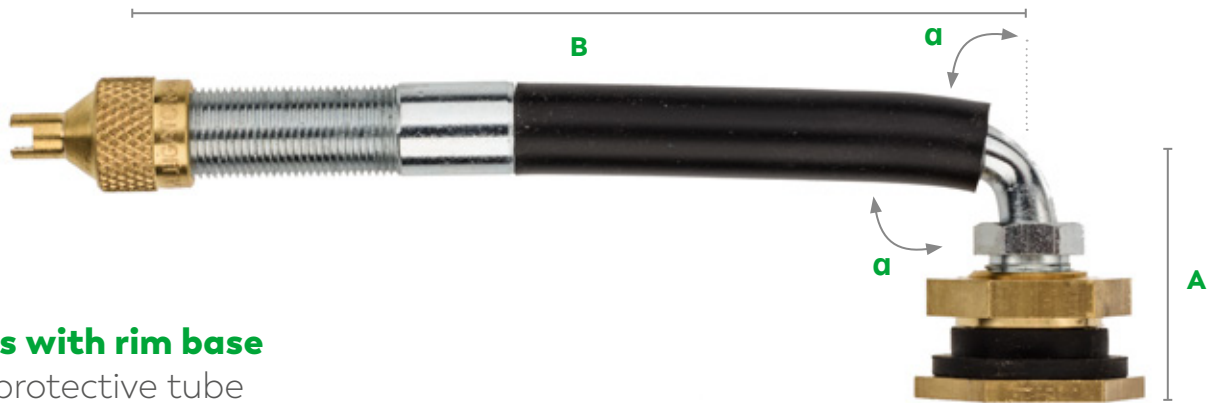

LARGE BORE VALVES


With rim base

- **Application:** For rim valves on tubeless EM tires
- **Design:** With base
- **Valve hole:** 20.5 + 0.5 mm
- **Installation torque:** 20–23 Nm







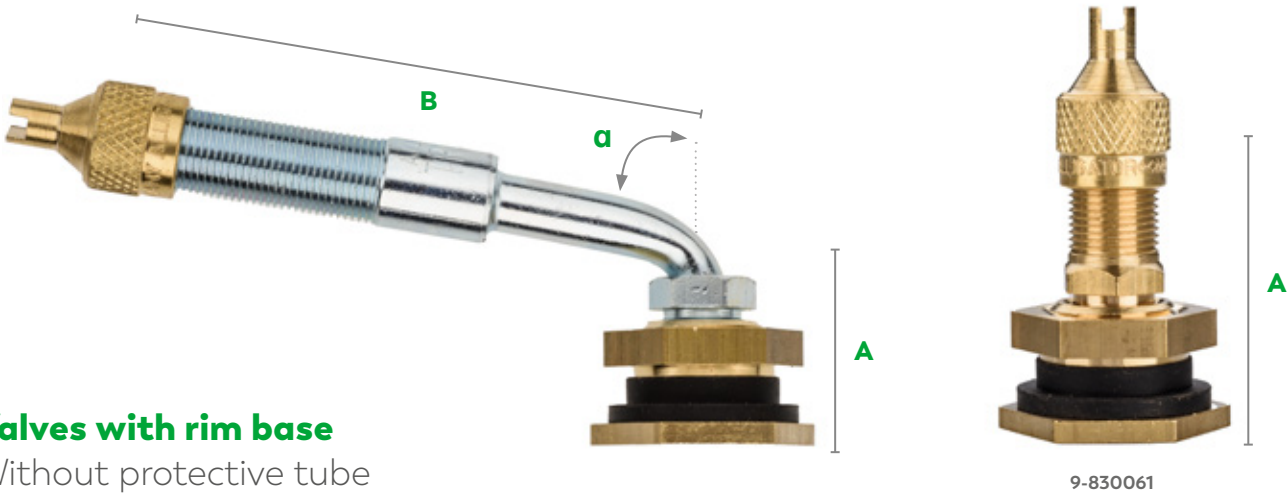






Valves with rim base
With protective tube

Art. no.	TR no.	A (mm)	B (mm)	Bending angle α (°)	Qty	Vehicle type	Material	Surface	Valve caps
9-830236	J651-03	32	119	90	10		CuZn	Ni	
9-830266	J658-03	27	140	80			CuZn	Ni	
9-830261	J652-03	27	140	86	10		CuZn	Ni	





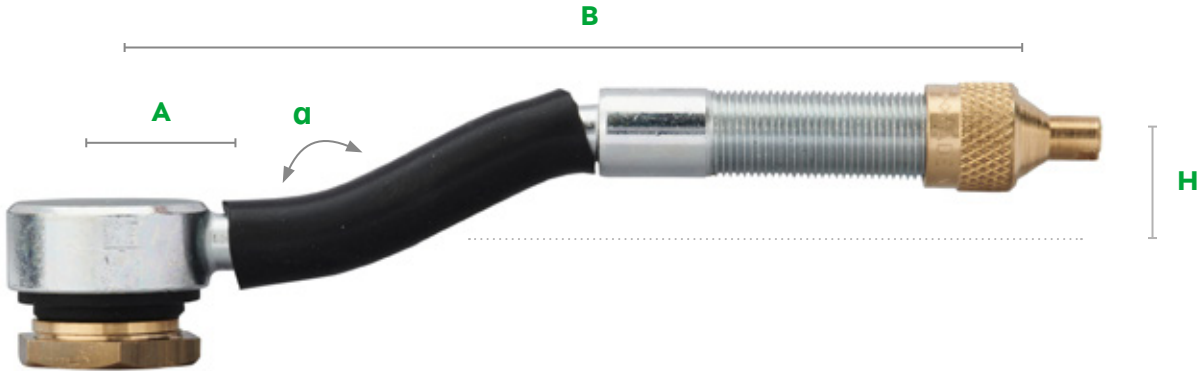

Valves with rim base
Without protective tube


Art. no.	TR no.	A (mm)	B (mm)	Bending angle α (°)	Vehicle type	Material	Surface	Valve caps
9-830061	J670-03	41				CuZn	-	
9-830146	J653-03	27	64	80		CuZn	Ni	
9-830166	J654-03	27	80	60		CuZn	Ni	
9-830176	J655-03	27	80	74		CuZn	Ni	
9-830161	J650-03	27	80	80		CuZn	Ni	







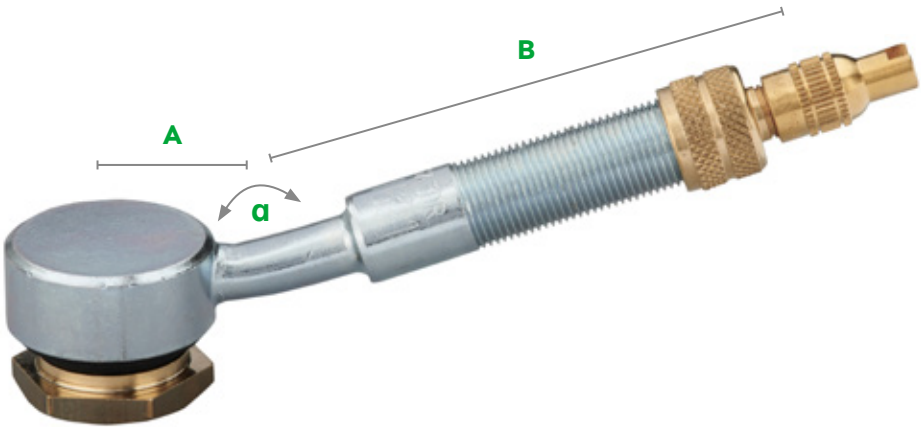

Valve EM large bore turret
With protective tube

Art. no.	TR no.	ETRTO no.	A (mm)	B (mm)	H (mm)	Bending angle α (°)	Qty	Vehicle type	Material	Surface	Valve caps
9-850167*	J695		20	105	25	50	10		CuZn	Ni	
9-850191	J690	V5.05.1	32	119	14	28	10		CuZn	Ni	

* Screw driver valve cap 8V1 with adapter



Valve EM large bore turret
Without protective tube


Art. no.	TR no.	ETRTO no.	A (mm)	B (mm)	Bending angle α (°)	Qty	Vehicle type	Material	Surface	Valve caps
9-850131	J691	V5.09.1	20	65	18	10		CuZn	Ni	
9-850121	J694		20	70	28	10		CuZn	Ni	
9-850154*			20	95	22	10		CuZn	Ni	

* Screw driver valve cap 8V1 with adapter

LARGE BORE VALVE EXTENSIONS

For difficult to access EM large bore valves

Brass
Rigid

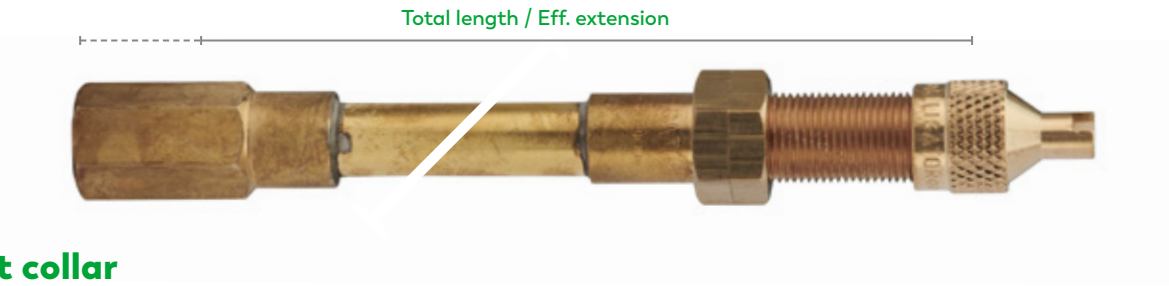

With support collar

Art. no.	Total length (mm)	Eff. extension (mm)	Wrench size	Vehicle type	Valve caps
9-340121	50	32	14		
9-340241	82	64	14		
9-340331	104	86	14		
9-340401	120	102	14		
9-340441	132	114	14		
9-340501	145	127	14		
9-340541	159	141	14		
9-341241	336	318	14		
9-341871	498	480	14		
9-342021	533	515	14		


Rubber
Highly flexible



Rubber

Art. no.	Total length (mm)	Eff. extension (mm)	Wrench size	Vehicle type	Valve caps
9-350641	140	121	16		
9-350661	160	141	16		
9-350721	180	161	16		
9-350771	210	191	16		
9-351071	275	256	16		
9-351171	300	281	16		
9-351241	320	301	16		
9-351411	360	341	16		
9-351641	420	401	16		
9-351871	480	461	16		
9-352171	555	536	16		
9-352421	615	596	16		
9-352711	689	670	16		
9-352801	710	691	16		

Max. operating pressure: Up to 10 bar / 145 psi

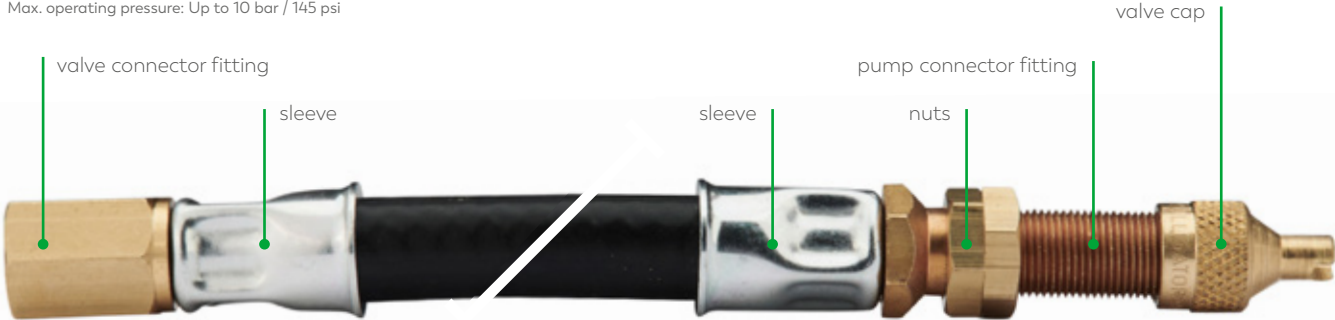

Special item











Art. no.	Description	Contents	Vehicle type
9-093524	EM rubber valve extensions	200 nuts 100 EM screw driver valve caps 12V1 100 pump connector fittings 100 valve connector fittings 200 sleeves	

Rubber with steel braid


Flexible



Rubber with steel braid

Art. no.	Total length (mm)	Eff. extension (mm)	Wrench size	Vehicle type	Valve caps
9-350671	140	121	16		
9-351242	320	301	16		
9-351971	480	461	16		
9-352071	555	536	16		
9-352422	615	596	16		


Max. operating pressure: Up to 20 bar / 290 psi

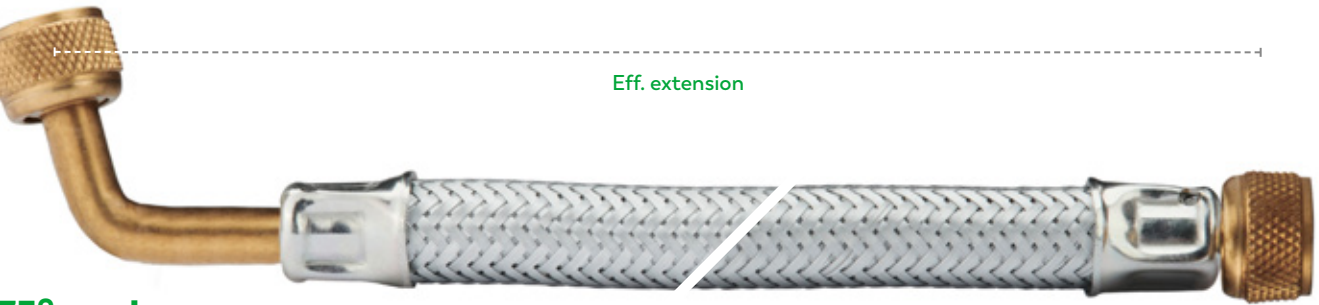

75° angle

Art. no.	Eff. extension (mm)	Vehicle type
9-356070	200	

Max. operating pressure: Up to 20 bar / 290 psi

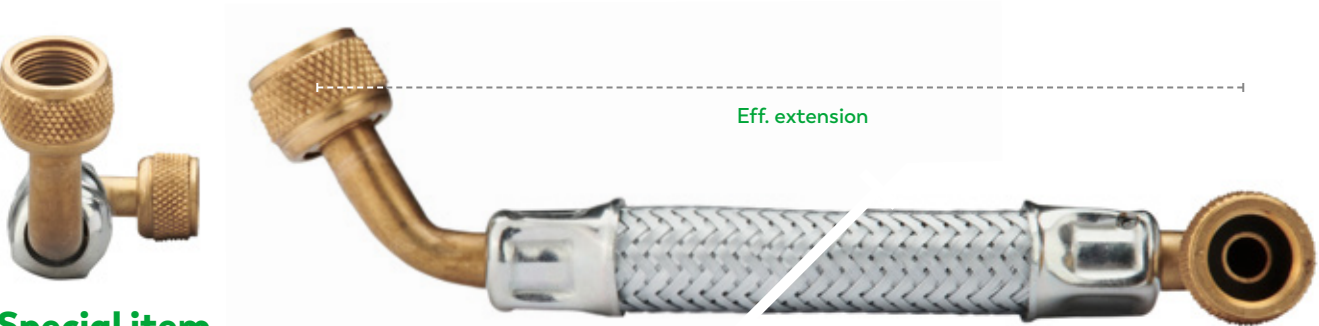

Special item

Art. no.	Description	Eff. extension (mm)	Vehicle type
9-290090	Tube extension (two 12V1)	292.5	

Max. operating pressure: Up to 20 bar / 290 psi

ACCESSORIES

For EM large bore valves




Valve caps

Art. no.	Description	TR no.	Vehicle type	Material	Surface	Valve caps
9-305000	EM large bore screw driver valve caps 8V1	VC4		CuZn	-	
9-304000	EM large bore screw driver valve caps 12V1	VC6		CuZn	-	
9-304500	EM large bore valve cap hex	VC7		CuZn	-	



9-305000 9-304000 9-304500

Valve cores



Art. no.	Description	TR no.	Length (mm)	Vehicle type	Material	Surface
9-319900	EM large bore valve core short	C2	21		CuZn	Ni
9-033245	EM large bore valve core short	C2	28		CuZn	Ni
9-319700	EM large bore valve core long	C2	38		CuZn	Ni



9-319900 9-033245 9-319700



Adapter / Reducer



Art. no.	TR no.	Pump connector	Valve connector	Vehicle type	Material	Surface	
9-338501		8V1 (car)	12V1 (EM)		CuZn	-	★
9-338601	AD1	8V1 (car)	8V1 (car)		CuZn	-	




Thumb-lock air chuck for 12V1 (large bore valves)

Art. no.	Connection diameter (mm)	Tube inner diameter (mm)	Vehicle type	Material	Surface	
9-142700	7	6		CuZn	Ni	
9-142800	9	8		CuZn	Ni	★



9-143400

Clip-on air chuck for 12V1 (large bore valves)

Art. no.	Variant	Connection diameter (mm)	Tube inner diameter (mm)	Vehicle type	Material
9-143400	open end	8	7		CuZn



Tool

Art. no.	Description	Total length (mm)	Vehicle type
9-230700	Valve fishing tool 12V1	315	

APPLICATION OF THE VALVE FISHING TOOL

- Insert the head of the valve fishing tool through the hole and screw it onto the valve.
- Designed to assist valve hole location when fitting tubes.
- The handle can also be used as a screw driver for standard valve cores.

MOTORCYCLE VALVES



Valves come in all shape and sizes. Discover the ALLIGATOR range of motorcycle valves.

CONTENTS

Valve hole 8.3..... 96

Valve hole 11.3 98

Valve hole 8.3 + 0.3 mm



Brass valves

Art. no.	TR no.	ETRTO no.	Length (mm)	Wrench size	Installation torqwue (Nm)	Qty	Vehicle type	Material	Surface	Valve caps
9-447413			25	11	7-10	20		CuZn	Ni	
9-511992			26	11	5-7	20		CuZn	Ni	
9-511003			33	10	3-5	20		CuZn	Ni	
9-447513	430eq	V1.10.1	34	11	7-10	20		CuZn	Ni	
9-511993			39	11	5-7	20		CuZn	Ni	

Maximum working pressure: 14 bar / 200 psi



Aluminum valves

Art. no.	ETRTO no.	Length (mm)	Wrench size	Bending angle (°)	Installation torque (Nm)	Qty	Vehicle type	Material	Surface	Valve caps
9-447500	V1.10.2	24	12	80	7-10	20		Al	Elox	
9-447505	V1.10.2	24	12	80	7-10	20		Al	Elox	

Maximum working pressure: 14 bar / 200 psi
Only use with nickel-plated valve core to avoid contact corrosion!



Tube valves – straight

Art. no.	TR no.	Length (mm)	Wrench size	Qty	Vehicle type	Material	Surface	Valve caps
9-410503	4EQ	33.5	10	20		CuZn	Ni	
9-440003		43	10	20		CuZn	Ni	

Maximum working pressure: 7 bar / 100 psi



Tube valve - 70°

Art. no.	Length (mm)	Bending angle (°)	Wrench size	Qty	Vehicle type	Material	Surface	Valve caps
9-446013	41.5	70	10	20		CuZn	Ni	

Maximum working pressure: 7 bar / 100 psi



Spare part for 9-440003 and 9-446013

Art. no.	Description	Material	Surface
9-321800	Spare part for tube valves	CuZn	Ni

Valve hole 11.3 + 0.4 mm



Brass valves for scooters

Art. no.	Bending angle (°)	Installation torque (Nm)	Qty	Vehicle type	Material	Surface	Valve caps
9-520944	90	7-10	100		CuZn	-	

Maximum working pressure: 4,5 bar / 65 psi
Maximum speed limit: 80 km/h / 50 mph



9-521515

9-521545

Brass valves for motorcycles

Art. no.	TR no.	ETRTO no.	Length (mm)	Qty	Vehicle type	Material	Surface	Valve caps
9-521515	412	V2.03.06	33	100		CuZn	-	
9-521527	412 unmounted	V2.03.06	33	100		CuZn	-	
9-521545	412	V2.03.06	33	100		CuZn	-	

Maximum working pressure: 4,5 bar / 65 psi



9-447512

9-447515

Aluminum valves

Art. no.	ETRTO no.	Length (mm)	Wrench size	Bending angle (°)	Installation torque (Nm)	Qty	Vehicle type	Material	Surface	Valve caps
9-447512	V2.03.15	25	14	80	3-5	20		Al	Elox	
9-447515	V2.03.15	25	14	80	3-5	20		Al	Elox	

Maximum working pressure: 14 bar / 200 psi
Only use with nickel-plated valve core to avoid corrosion!



Tube valves

Art. no.	TR no.	Length (mm)	Bending angle (°)	Qty	Vehicle type	Material	Surface	Valve caps
9-445011	88	38	90	20		CuZn	-	

Maximum working pressure: 7 bar / 100 psi

BICYCLE VALVES

With the invention of the express valve, ALLIGATOR had a huge impact on the cycling world. Now it has an exciting new development in the range: the further developed universal express valve.

CONTENT

Express valve.....	102
Universal express valve.....	104
Presta valve (Sclaverand).....	106
Air pump valve adapter.....	107
Universal service station air chuck	108
Rotatable tire inflator.....	110



EXPRESS VALVE

The original

- **Application:** Trekking bikes, fitness bikes, city bikes
- **Rim hole:** 8.5 mm
- **Operating pressure:** Up to 6 bar
- **Air pump:** Bicycle pump (or use adapter)


ADVANTAGES

- Inflate tires effortlessly
- Excellent seal retention
- High quality, exceptionally long service life

Express valve feature

How does the express valve work?

- The rim nut holds the express valve securely in the valve body.
- The outer seal prevents the air compressed in the tire from escaping between the express valve and the valve body.
- The excess pressure in the bicycle tire forces the non-return element into place.
- The fill opening of the express valve is closed securely.

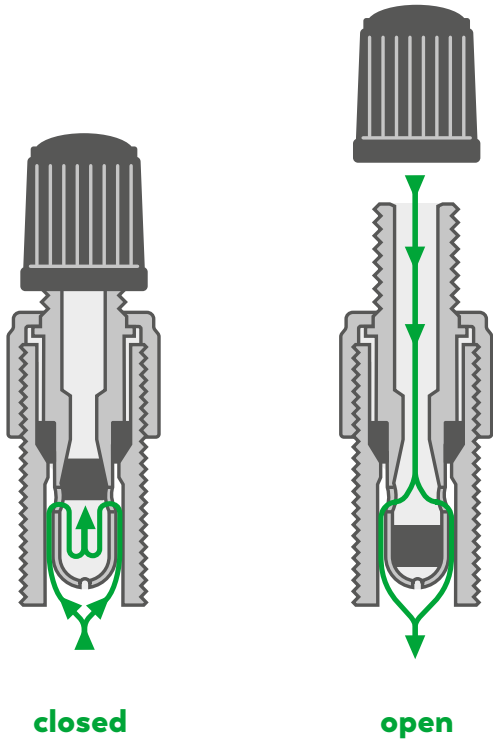

Express valve



Art. no.	Description	Vehicle type	Material	Surface	Valve caps
9-110000	Express valve (without cap)		CuZn	Ni	-
9-110010	Express valve		CuZn	-	
9-110001	Express valve		CuZn	Ni	
9-110002	Express valve (incl. counter display)		CuZn	Ni	

Express valve with rim nut



Art. no.	Vehicle type	Material	Surface	Valve caps
9-110215		CuZn	-	
9-110201		CuZn	Ni	

UNIVERSAL EXPRESS VALVE

One valve suitable for all bicycles

- **Application:** Suitable for all bikes
- **Rim hole:** Variable applications
- **Operating pressure:** Up to 15 bar
- **Air pump:** Bicycle pump (or use adapter)

Advanced dual-seal design allows universal application

- Prevents gradual air leakage.
- High-pressure resistance thanks to two-stage cone seal.


ADVANTAGES

- Universal application
- Can also withstand “racing bike” pressure
- Inflate tires effortlessly
- Excellent seal retention
- High quality, exceptionally long service life

Simple application:

No more struggling to sort through all the different types of bicycle valves

- Universal high-pressure valve core.
- Use the appropriate rim nut for car and express valve.
- Fits all commercially available valve bodies, tubes and rim holes*.

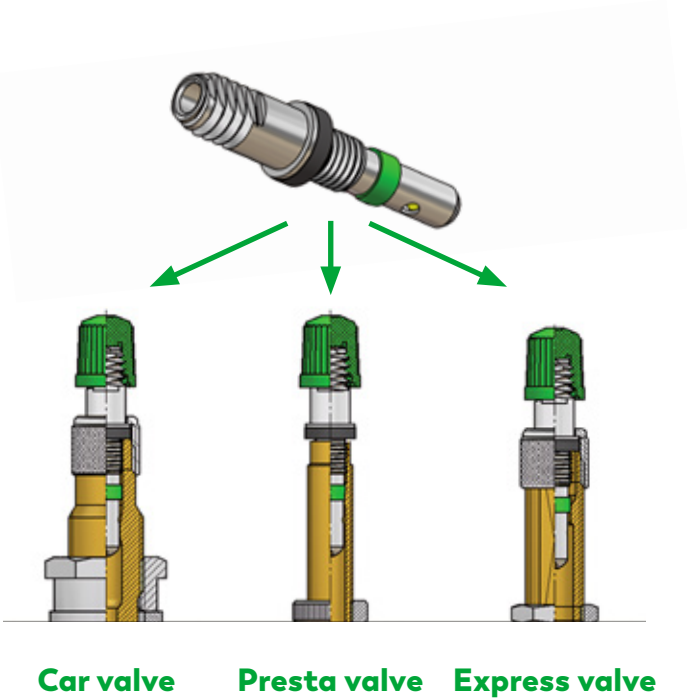

* not suitable for Dunlop stem with side slits.



Universal express valve

Art. no.	Description	Vehicle type	Material	Surface	Valve caps
9-111002	Universal express valve		CuZn	Ni	

Spare parts & Accessories

Express valve/universal express valve



Valve caps

Art. no.	Color	Vehicle type	Material	Valve caps
9-049151	Black		Plastic	
9-049157	Green		Plastic	



Rim nuts

Art. no.	Description	Vehicle type	Material	Surface
9-105000	Union nut VG7.8 (for express valve body)		CuZn	Ni
9-105300	Union nut 8V1 (for car valve body)		CuZn	Ni

PRESTA VALVE (SCLAVERAND)

Ideal for narrow rims

- **Application:** Racing bike, mountain bike, tubeless
- **Rim hole:** 6.5 mm
- **Operating pressure:** Up to 15 bar
- **Air pump:** Bicycle pump (or use adapter)

ADVANTAGES

- High pressure resistance up to 15 bar
- Air pressure readable using floor pump
- Air pressure can be precisely adjusted
- Thin rim hole ensures high stability



Valves

Art. no.	Description	ETRTO no.	Vehicle type	Material	Surface	Valve caps
9-033180	Presta valve (without cap)			CuZn	Ni	-
9-033181	Presta valve spare parts set			CuZn	Ni	
9-121004	Presta valve bicycle tube valve	V1.01.2		CuZn	Ni	



Accessories

Art. no.	Description	ETRTO no.	Vehicle type	Material	Surface
9-031205	Presta valve cap – black	V9.04.1		Plastic	-
9-125100	Presta valve cap			CuZn	Ni
9-033182	Tool for Presta valves			Plastic	-
9-124599	Rim nut for Presta valve 6V1	V9.03.1		CuZn	Ni

AIR PUMP VALVE ADAPTER

For inflating bicycle tires – versatile use



Adapter

Art. no.	Description	Valve connector	Pump connector	Vehicle type	Material	Surface
9-138800	Adapter with built-in check valve and valve pin	Car	Express valve		CuZn	Ni
9-138600	Adapter with seal	Car	Express valve		CuZn	-
9-138300	Adapter	Express & Presta valve	Car		CuZn	-
9-138100	Adapter with seal	Express valve	Car		CuZn	-
9-138900	Adapter	Presta valve	Express valve		CuZn	-
9-139000	Adapter with seal	Presta valve	Express valve		CuZn	-


UNIVERSAL SERVICE STATION AIR CHUCK

For Presta, express and car valves



For vales of motorcycle vehicles & bicycles (Presta & express valves)
Closed end

Art. no.	Connection type	Length (mm)	Connector diameter (mm)	Hose inner diameter (mm)	Vehicle type	Material	Surface	
9-148500	Female thread R1/4	175				CuZn	Ni	★
9-148600	Hose connection 8/7	175	8	7		CuZn	Ni	★

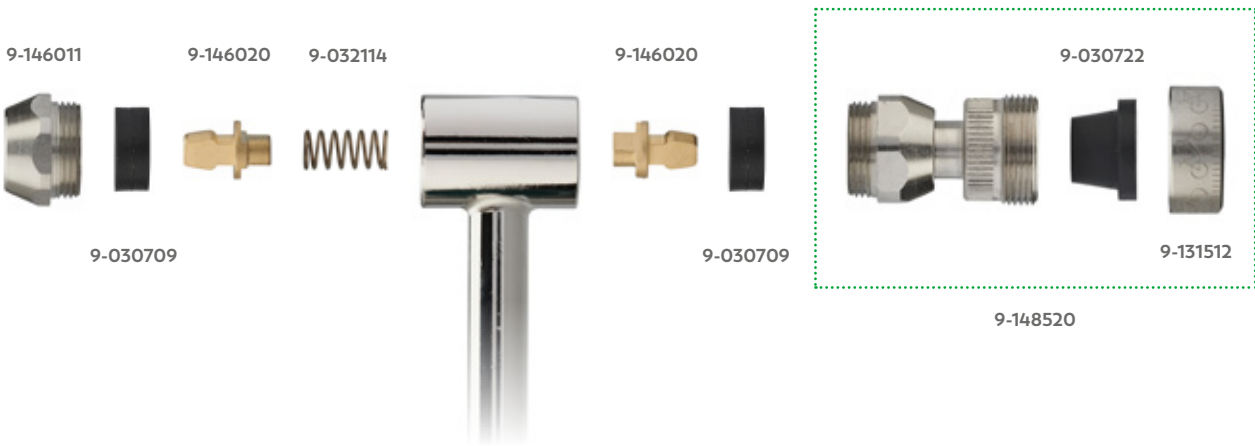

Spare parts

Art. no.	Description	Material	Surface	
9-030709	Rubber grommet NBR70 (motor vehicle and bicycle side)	Rubber	-	
9-030722	Rubber grommet NBR70 (bicycle side)	Rubber	-	
9-032114	Steel pressure spring	Fe	-	
9-131512	Cover (bicycle side)	CuZn	Ni	
9-148520	Connection (bicycle side)	CuZn / Rubber	Ni / -	★
9-146011	Cover (motor vehicle side)	CuZn	Ni	
9-146020	Deflator pin (motor vehicle side)	CuZn	-	



For valves of motorcycle vehicles & express valves
Closed end

Art. no.	Connection type	Length (mm)	Connector diameter (mm)	Hose inner diameter (mm)	Vehicle type	Material	Surface	
9-148000	External thread 8V1	265				CuZn	Ni	
9-148100	Hose connection 8/7	260	8	7		CuZn	Ni	★
9-148200	Female thread R1/4	250				CuZn	Ni	★



Spare parts

Art. no.	Description	Material	Surface	
9-030709	Rubber grommet NBR70 (motor vehicle and bicycle side)	Rubber	-	
9-030723	Replacement seal (combined version)	Rubber	-	
9-032114	Steel pressure spring	Fe	-	
9-146010	Cover (motor vehicle side)	CuZn	Ni	
9-146020	Deflator pin (motor vehicle side)	CuZn	-	
9-148010	Cover (motor vehicle side)	CuZn	Ni	
9-148020	Deflator pin (combined version - closed end)	CuZn	-	

ROTATABLE TIRE INFLATOR

For bicycle and car valves



- FLEXIBILITY IN ALL ASPECTS**
- Revolving connection, valve can be filled in every position.
 - Fast tool change possible due to quick connector. Shockproof and robust plastic housing.
 - Readability of the pressure gauge ensured in any valve position.

Rotatable tire inflator

Art. no.	Description	Vehicle type
9-149980	Rotatable tire inflator with rapid coupling	
9-149979	Rotatable tire inflator with rapid coupling (for Switzerland)	



Accessories for rotatable tire inflator

Art. no.	Description	Vehicle type	Material	Surface
9-149981	Rotatable connector G1/4		CuZn	Ni
9-149978	Piston – complete (spare part for 9-149979 + 9-149980)		Plastic	-



Accessories for inflating equipment for express valve

Art. no.	Description	Vehicle type	Material	Surface
9-132101	Bicycle plug nipple 6/5		CuZn	-
9-133201	Bicycle clip valve plug nipple 8/7		CuZn	Ni
9-132611	Plug-in transition nipple with safety chain*		CuZn	Ni

* Suitable for connection with thumb-lock air chuck for motor vehicles.



TOOLS

For the professional assembly of valves.


CONTENTS

Valve mounting tool.....	114
Rethreading tools.....	116
Valve screw driver.....	117
Other tools.....	119

VALVE MOUNTING TOOL

For efficient assembly of snap-in valves

■ **Application:** For original equipment (OE) and tire workshop

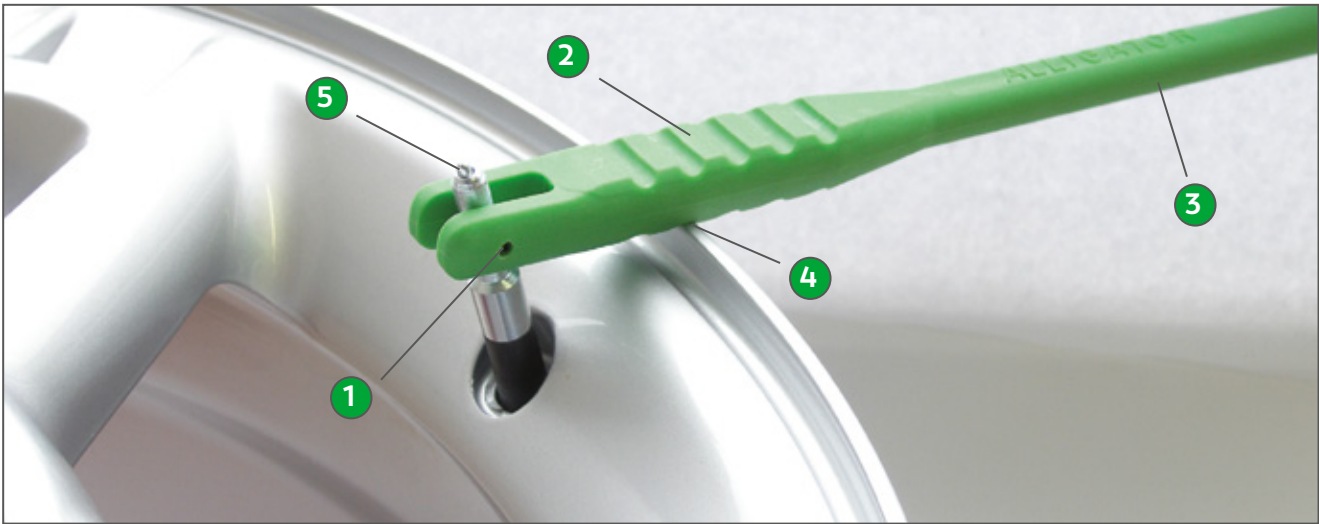

- 1 **Pivoting joint** prevents the valve from being retracted at an angle.
- 2 **Snap-in notches** ensure a correct angle.
- 3 **Long lever arm** for an optimal force application.
- 4 **Soft plastic shaft** prevents damage to aluminum wheels.
- 5 **The "click" mechanism in the head** allows rapid screwing onto the valve.



9-231900



9-231930



9-231940

Valve mounting tool

Art. no.	Description
9-231900	Standard valve mounting tool
9-231940	Valve mounting tool+ (combined with valve screw driver)
9-231930	Valve mounting tool OE



RETHREADING TOOLS

For easy and quick repair

- Properties**
- Facilitates and accelerates valve repair.
 - Made of robust tool steel.
 - Surface protected against corrosion.



Valve rethreader

Art. no.	Description
9-235041	Valve rethreader
9-235051	Valve rethreader
9-235061	Valve rethreader

Valve rethreader

Art. no.	Description
9-235020	Four-way valve tool



VALVE SCREW DRIVER

For easy (dis)assembly of valve cores




Valve screwdriver

Art. no.	Description
9-232602	Universal valve tool
9-232640	Tool insert (valve cores and screw driver valve caps)
9-232650	Tool insert (EM large bore valve cores and screw driver valve caps)

Simple valve core screw driver

Art. no.	Intended use
9-232505	(Dis)assembly of standard valve core



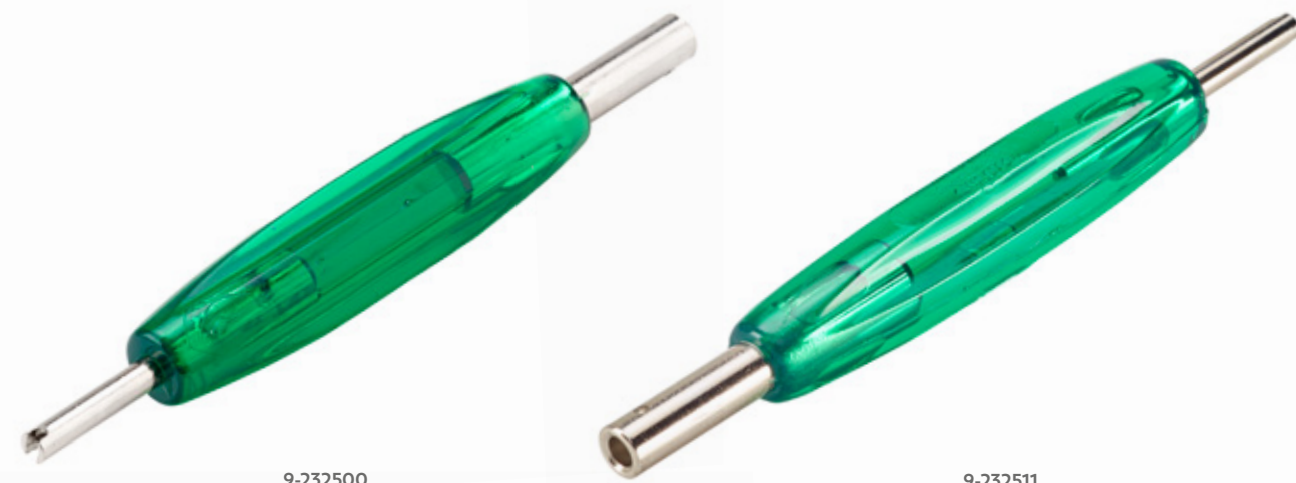

Dual valve screw driver

Art. no.	Intended use
9-232500	(Dis)assembly of standard valve core + screw driver valve cap
9-232511	(Dis)assembly of standard valve core + screw driver valve cap; with magnet
9-232503	(Dis)assembly of standard valve core + EM large bore valve core
9-232540	(Dis)assembly of standard valve core + fixing tool TPMS aluminum valves

OTHER TOOLS

Small devices – big effect

APPLICATION OF THE VALVE FISHING TOOL

- Insert the head of the valve fishing tool through the hole and screw it onto the valve.
- Designed to assist valve hole location when fitting tubes.
- The handle can also be used as a screw driver for standard valve cores.



Valve fishing tool

Art. no.	Description
9-230500	Valve fishing tool 8V1
9-230700	Valve fishing tool 12V1 (EM)

Tread depth gauge

Art. no.	Description
9-235800	Tread depth gauge

Pocket air pressure gauge

Art. no.	Description
9-149990	Pocket air pressure gauge



VALVE CAPS

Valve caps are an integral part of the ALLIGATOR valve world and the basic requirement for the permanent functionality of the valve.

CONTENT

Car / truck valve caps	122
Double seal valve caps	127
Bicycle valve caps.....	128
EM large bore valve caps	129

CAR / TRUCK VALVE CAPS

8V1 Thread

Standard valve caps

Brass | with sealing



Art. no.	Description	TR no.	Qty	Vehicle type	Material	Surface	
9-301500	Metal valve cap	VC3	100		CuZn	Ni	★
9-300500	Screw driver valve cap	VC2	100		CuZn	Ni	★
9-093032	Long metal valve cap	VC3eq	100		CuZn	Ni	

Valve extension caps

Brass | with sealing



Art. no.	Length (mm)	Eff. length (mm)	Vehicle type	Material	Surface
9-330201	27	19		CuZn	Ni
9-330401	41	32		CuZn	Ni

Special valve caps

Brass | with sealing



Art. no.	Description	TR no.	ETRTO no.	Vehicle type	Material	Surface
9-300000	Screw driver valve cap with protective cap	VC2	V9.04.4		CuZn	Ni
9-031210	Protective cap for screw valve cap				Rubber	-
9-302100	Screw driver valve cap with protective tube				CuZn	Ni
9-303070	Hexagonal valve cap	VC5			CuZn	Ni
9-303220	Hexagonal valve cap				CuZn	Ni

Round top valve caps

Aluminium | with sealing



Art. no.	Color	Vehicle type	Material	Surface	
9-394927	Silver		Al	Elox	★
9-394928	Black		Al	Elox	
9-394929	Titanium gray		Al	Elox	

Only use on aluminium valves.



Standard valve caps (on request)

Plastic



9-093019

Art. no.	Color	TR no.	Qty	Vehicle type	Material
9-093019	Black	VC8	100		Plastic



9-300007



9-300117



9-300119



9-300118



9-300116



9-300125

With sealing

Plastic

Art. no.	Color	Qty	Vehicle type	Material
9-300007	Black	100		Plastic
9-300117	Green*	100		Plastic
9-300119	Red	100		Plastic
9-300118	Blue	100		Plastic
9-300116	Yellow	100		Plastic
9-300125	Silver	100		Plastic

* Green valve caps indicate a tire filled with nitrogen.

Valve extension caps

Plastic



9-330275

9-330301

9-330501

Art. no.	Length (mm)	Eff. length (mm)	Vehicle type	Material
9-330275	20	12		Plastic
9-330301	28	19		Plastic
9-330501	40	32		Plastic

TIRES WITH NITROGEN

Green valve caps indicate tires filled with nitrogen



BENEFITS

- Improved driving stability and dynamics
- Higher driving comfort
- Improved retention of the driving shocks
- Reduced tire wear
- Protection of tires and rims, therefore high costs avoidance
- Increased tire life
- Fuel costs reduction

NOTE

Check regularly the tire pressure even if the tires are filled with nitrogen.

DOUBLE SEAL VALVE CAPS

AIR PRESSURE TESTING & FILLING MADE EASY

NO NEED TO UNSCREW THE VALVE CAP

AIR PRESSURE EASY TO CHECK AND ADJUST

NO PRESSURE LOSS WITH DAMAGED VALVE INSERT



V2B

DS-P



DOUBLE SEAL VALVE CAPS

No unscrewing necessary

Sealing concept

- Check and adjust air pressure without unscrewing the valve cap.
- Two high-temperature seals prevent pressure loss even if the valve insert is damaged or dirty.
- Completely sealed face protects against water and dirt.

BENEFITS

- Saves time and money
- Prevents dirty fingers
- Insensitive to dirt and water
- Does not get lost
- Provides increased safety

To the DS-P explanatory video

<https://bit.ly/37XoyXE>



VALVE CAPS

V2B

For brass valves

Art. no.	Description	TR no.	Qty	Vehicle type	Material	Surface
9-330708	V2B valve cap	VC12	10		CuZn	Ni
9-330709	V2B valve cap	VC12	50		CuZn	Ni

Only use on brass valves.
Not suitable for motorcycles.

DS-P (Double Seal Premium)

For plastic, brass and aluminum valves

Art. no.	Description	Qty	Vehicle type	Material
9-330770	DS-P valve cap	50		Plastic

Not suitable for motorcycles.



BICYCLES VALVE CAPS

5V2 Thread



9-049151 9-0149157

For express valve

Art. no.	Color	Qty	Vehicle type	Material
9-049151	Black	100		Plastic
9-049157	Green			Plastic



9-031205 9-125100

For Presta valve (Sclaverand)

Art. no.	Description	ETRTO no.	Vehicle type	Material	Surface
9-031205	Plastic valve cap	V9.04.1		Plastic	-
9-125100	Metal valve cap			CuZn	Ni







EM LARGE BORE VALVE CAPS

12V1 Thread




9-305000 9-304000 9-304500

Valve caps

Art. no.	Description	TR no.	Vehicle type	Material	Surface	Valve cap
9-305000	EM large bore screw driver valve cap 8V1	VC4		CuZn	-	
9-304000	EM large bore screw driver valve cap 12V1	VC6		CuZn	-	
9-304500	EM large bore hexagonal valve cap	VC7		CuZn	-	

GENERAL INFORMATION FOR USE

- **Only use accessories approved by the valve manufacturer!**
A weight or length increase of the valve due to unsuitable accessories can have a negative effect on your safety.
- **Use a valve cap with seal!**
Only in this way the tightness of the tire can be ensured.
- **Make sure that the valve is seated correctly!**
Valves should not protrude beyond the outer edge of the rim.

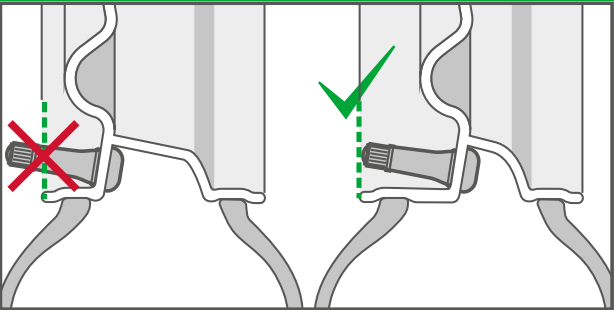

A close-up photograph of a valve core on a wheel rim. The valve core is a small, cylindrical metal component with a hexagonal base and a threaded top. It is mounted on a dark, possibly black, wheel rim. The background is blurred, showing the curved lines of the wheel and the metallic surface of the rim.

VALVE CORES

ALLIGATOR valve cores fit every application and every vehicle - with the highest quality!

CONTENT

Standard valve cores 132

EM large bore valve cores 135

VALVE CORES

For every application

Characteristics

- Protects against dirt, moisture and gradual loss of pressure
- High impermeability
- Easy to use
- High quality processing

Color coding


- For easy differentiation of valve cores in everyday work in the workshop
- No technical meaning



NOTE

- Use brass inserts only for brass valves.
- Nickel-plated inserts suitable for brass and aluminum valves.
- Recommended tightening torque: 0.23 to 0.56 Nm

Position and tolerance of the valve insert

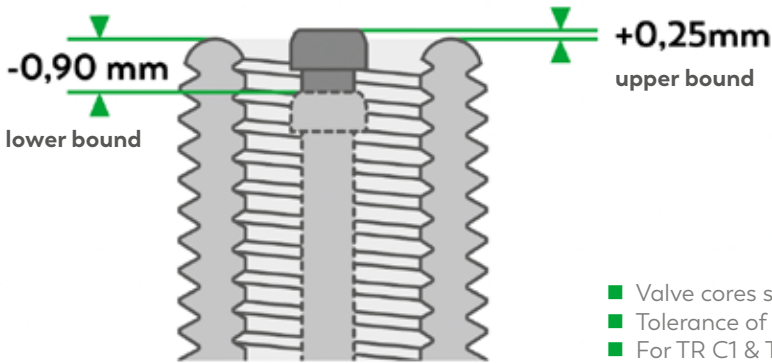

- Valve cores should be flush with the valve mouth.
- Tolerance of -0.90 and +0.25 mm is allowed.
- For TR C1 & TR C2

Standard valve cores

5V1 Thread



9-314011

9-093118

Short valve cores

Art. no.	TR no.	Length (mm)	Qty	Vehicle type	Material	Surface
9-314011	C1	16	100		CuZn	Ni
9-093118	C1	16	100		CuZn	Ni



9-093123

9-093135

9-315000
9-315500

Standard valve cores

Art. no.	TR no.	Length (mm)	Qty	Vehicle type	Material	Surface
9-093123	C1	20	100		CuZn	-
9-093135	C1	20	100		CuZn	Ni
9-315000	C1	20	100		CuZn	Ni
9-315500	C1	20	5		CuZn	Ni



9-317211

9-315150

Motorcycle

Art. no.	TR no.	Length (mm)	Qty	Vehicle type	Material	Surface
9-317211	C1	20	100		CuZn	-
9-315150	C1	20			CuZn	Ni

Reinforced spring, higher opening pressure (> 4.5 bar).

Long valve cores

Art. no.	TR no.	Length (mm)	Qty	Vehicle type	Material	Surface
9-312000	C1	33	100		CuZn	Ni
9-312500	C1	33	5		CuZn	Ni



ALLIGATOR VALVES

FOR HEAVY DUTY



Large bore valve cores

8V1 Thread



9-319900 9-033245

Large bore short valve cores

Art. no.	TR no.	Length (mm)	Vehicle type	Material	Surface
9-319900	C2	21		CuZn	-
9-033245	C2	28		CuZn	Ni



9-319700

Large bore long core valve

Art. no.	TR no.	Length (mm)	Vehicle type	Material	Surface
9-319700	C2	38		CuZn	Ni



TIRE FILLING EQUIPMENT

The ALLIGATOR inflation equipment range includes a wide selection of products with which you can inflate tires and check the air pressure quickly and easily.

CONTENT

Clip-on air chucks 138

Clip-on ball foot air chucks..... 140

Thumb-lock air chucks..... 142

Service station dual foot air chucks..... 145

Tire inflators & accessories 153

CLIP-ON AIR CHUCKS

For a fast tire inflation

- **Open end:** Constantly open - even after removal from the tire valve due to subsequent pressure gauge.
- **Closed end:** Self-closing after removal from the tire valve.



Clip-on air chucks for motor vehicles

Open end

Art. no.	Connector diameter (mm)	Hose inner diameter (mm)	Vehicle type	Material	
9-143000	6	5		CuZn	★
9-142999	7	6		CuZn	★
9-143100	8	7		CuZn	★



Clip-on air chuck for motor vehicles

Closed end

Art. no.	Connector diameter (mm)	Hose inner diameter (mm)	Vehicle type	Material	Surface
9-143350	8	7		CuZn	Ni



EM large bore clip-on air chuck

Open end

Art. no.	Connector diameter (mm)	Hose inner diameter (mm)	Vehicle type	Material
9-143400	8	7		CuZn



Spare part for 9-143400

Art. no.	Description	Material
9-033401	Replacement seal	Rubber

CLIP-ON BALL FOOT AIR CHUCKS


For an easy connection of the tire filler with the valve

- **Open end:** Constantly open - even after removal from the tire valve due to subsequent pressure gauge.
- **Closed end:** Self-closing after removal from the tire valve.



With clip | for hose connection




Open end

Art. no.	Connector diameter (mm)	Hose inner diameter	Vehicle type	Material	Surface
9-143976	6	5		CuZn	Ni



With clip | for hose connection





Closed end

Art. no.	Connector diameter (mm)	Hose inner diameter (mm)	Vehicle type	Material	Surface
9-144051	6	5		CuZn	Ni
9-144151	8	7		CuZn	Ni
9-144171	9	8		CuZn	Ni

With no clip | for hose connection

Closed end



Art. no.	Connector diameter (mm)	Hose inner diameter (mm)	Vehicle type	Material	Surface
9-144001	6	5		CuZn	Ni
9-133201*	8	7		CuZn	Ni
9-144101	8	7		CuZn	Ni
9-144121	9	8		CuZn	Ni

* Special version for express valves



With no clip | for female thread

Closed end

Art. no.	Female thread	Vehicle type	Material	Surface
9-145451	1/4-18NPT		CuZn	Ni
9-145651	R 1/4		CuZn	Ni

Spare part for clip-on ball foot air chucks

Art. no.	Description	Material
9-030707	Replacement seal	Rubber





THUMB-LOCK AIR CHUCKS

For an easy & safe tire filling









Standard for motor vehicles

Art. no.	Connector diameter (mm)	Hose inner diameter (mm)	Vehicle type	Material	Surface
9-142200	6	5	 	CuZn	Ni







Extra robust for motor vehicles

Art. no.	Connector diameter (mm)	Hose inner diameter (mm)	Vehicle type	Material	Surface	
9-142300	5,5	4,5	 	CuZn	Ni	★
9-142400	7	6	 	CuZn	Ni	★
9-142500	9	8	 	CuZn	Ni	★





Standard with releasable screw connection for motor vehicles

Art. no.	Connector diameter (mm)	Hose inner diameter (mm)	Vehicle type	Material	Surface
9-143501	10	4,5	 	CuZn	Ni
9-143505	14	5	 	CuZn	Ni



Special air chuck with releasable screw connection for motor vehicles

Art. no.	Connector diameter (mm)	Hose inner diameter (mm)	Vehicle type	Material	Surface
9-144901	14	5	 	CuZn	Ni



Spare parts for extra robust & standard with releasable screw connection for motor vehicles

Art. no.	Bezeichnung	Material	Surface	
9-030717	Rubber seal	Rubber	-	
9-033030	Deflator	Fe	Zn	★
9-142310	Chuck nut for thumb-lock air chuck	CuZn	Ni	★



Tube deflator for motor vehicles

Art. no.	Connector	Vehicle type	Material	Surface
9-234300	Car (8V1)	 	CuZn	Ni



- Complete and quick air removal (Venturi effect).
- Compatible with any type of automotive air chuck.
- Strongly recommended for repair shops.

VENTURI EFFECT

- The air in the tire/tube is sucked out by the air flowing through the cross tube.
- Deflation is accelerated.



EM large bore thumb-lock air chucks

Art. no.	Connector diameter (mm)	Hose inner diameter (mm)	Vehicle type	Material	Surface
9-142700	7	6		CuZn	Ni
9-142800	9	8		CuZn	Ni



SERVICE STATION DUAL FOOT AIR CHUCKS

For filling valves that are difficult to access




CLOSED END - Green handle
Self-closing after removal from tire valve


OPEN END - Black handle
Permanently open after removal from the tire valve

CLOSED END


open

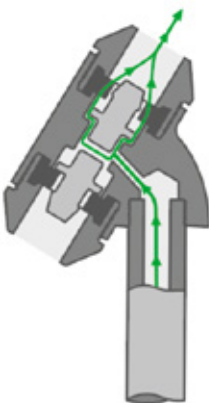

closed

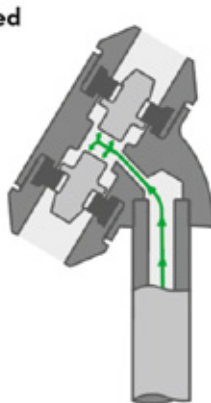

OPEN END

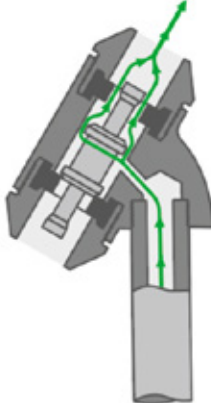



Service station dual foot air chucks

For external thread 8V1



With no handle

Art. no.	Variation	Length (mm)	Vehicle type	Material	Surface
9-146000	■ closed end	200		CuZn	Ni
9-147000	■ open end	230		CuZn	Ni



Straight

Art. no.	Variation	Length (mm)	Vehicle type	Material	Surface
9-146502	■ closed end	350		CuZn	Ni
9-147102	■ open end	350		CuZn	Ni



Straight – combined version

Art. no.	Variation	Length (mm)	Vehicle type	Material	Surface
9-148000*	■ closed end	265		CuZn	Ni

* Combined version for tire valves of motor vehicles and bicycles (express valves).



Bended

Art. no.	Variation	Length (mm)	Vehicle type	Material	Surface
9-146400	■ closed end	305		CuZn	Ni
9-147600	■ open end	305		CuZn	Ni

Service station dual foot air chucks

For female thread R1/4



With no handle

Art. no.	Variation	Length (mm)	Vehicle type	Material	Surface
9-146200	■ closed end	170		CuZn	Ni
9-147020	■ open end	170		CuZn	Ni



Straight

Art. no.	Variation	Length (mm)	Vehicle type	Material	Surface
9-146700	■ closed end	345		CuZn	Ni



Straight – combined version

Art. no.	Variation	Length (mm)	Vehicle type	Material	Surface
9-148200*	■ closed end	250		CuZn	Ni
9-148500**	■ closed end	175		CuZn	Ni

* Combined version for tire valves of motor vehicles and bicycles (express and Presta valves).
** Combined version for tire valves of motor vehicles and bicycles (express valves).



Bended

Art. no.	Variation	Length (mm)	Vehicle type	Material	Surface
9-146420	■ closed end	290		CuZn	Ni
9-147620	■ open end	290		CuZn	Ni



Service station dual foot air chucks

For hose connection



With no handle

Art. no.	Variation	Length (mm)	Vehicle type	Material	Surface
9-146100	■ closed end	230		CuZn	Ni



Straight

Art. no.	Variation	Length (mm)	Connector diameter (mm)	Hose inner diameter (mm)	Vehicle type	Material	Surface
9-146602	■ closed end	350	8	7		CuZn	Ni
9-147202	■ open end	350	8	7		CuZn	Ni



9-148100



9-148600

Straight – combined version

Art. no.	Variation	Length (mm)	Connector diameter (mm)	Hose inner diameter (mm)	Vehicle type	Material	Surface
9-148100*	■ closed end	260	8	7		CuZn	Ni
9-148600**	■ closed end	175	8	7		CuZn	Ni

* Combined version for tire valves of motor vehicles and bicycles (express valves).
** Combined version for tire valves of motor vehicles and bicycles (express and Presta valves).



Bended

Art. no.	Variation	Length (mm)	Connector diameter (mm)	Hose inner diameter (mm)	Vehicle type	Material	Surface
9-146410	■ closed end	290	8	7		CuZn	Ni
9-147610	■ open end	300	8	7		CuZn	Ni
9-147615	■ open end	300	9	8		CuZn	Ni

ACCESSORIES

Service station dual foot air chucks



CLOSED END - Green handle
Self-closing after removal from tire valve

OPEN END - Black handle
Permanently open after removal from the tire valve

CAR - OPEN END



CAR - CLOSED END



COMBINED VERSION - CLOSED END*



* 9-148000, 9-148100, 9-148200

Spare parts

Art. no.	Description	Material	Surface
9-146010	Chuck nut (motor vehicle side)	CuZn	Ni
9-148010	Chuck nut (bicycle side)	CuZn	Ni
9-146020	Deflator pin (motor vehicle side - closed end)	CuZn	-
9-148020	Deflator pin (combined version - closed end)	CuZn	-
9-147120	Double deflator pin (open end)	CuZn	-
9-032114	Steel pressure spring (closed end)	Fe	-
9-030709	Replacement seal (motor vehicle side)	Rubber	-
9-030723	Replacement seal (combined version)	Rubber	-

GATOR INFLATOR

CALIBRATED, FOR THE PERFECT AIR PRESSURE!



TIRE INFLATORS

Precise, practical, versatile

- Measuring range pressure: 0 - 12 bar / 0 - 175 psi
- Measurable medium: Air, nitrogen
- Hose length and plug: 0.5 m & clip-on air chuck*
- Connection thread: Quick coupling 3/8 inch



Gator Inflator

Art. no.	Description	Calibration	Operating temperature (°C)	Measuring range pressure (bar/psi)	Weight (g)
9-149946	MID	✓	-20 / +55	0-12/0-175	730
9-149955	MAX	✓	-20 / +55	0-12/0-175	800
9-149970	Digital OE	✓	-10 / +40	0-12/0-175	560

* Other hose lengths & valve connectors available upon request

PRECISE

- Calibrated manometer
- Reliable measurement results
- Precise processing

PRACTICAL

- Flexible hose
- Easy handling due to operating lever

VERSATILE

- Various hose lengths
- Valve adapter for all common connector variants



Rotatable tire filler

Art. no.	Description	Vehicle type	
9-149980	Rotatable tire inflator with quick coupling		★
9-149979	Rotatable tire inflator with quick coupling (Switzerland)		



Tire inflation hose with tire inflation manometer

Art. no.	Hose length
9-286188	1.5 m with clip-on air chuck and 18.5 m with wing nut M16x1.5



Tire inflation hose with clip-on air chuck

Art. no.	Hose length
9-281845	12 m with wing nut M16x1.5



Tire inflation hose with service station dual foot air chuck

Art. no.	Hose length
9-289760	15 m with wing nut M16x1.5



Wing nut M16x1.5

Art. no.	Length (mm)	Connector diameter (mm)	Hose inner diameter (mm)	Material	Surface	
9-158000	31	6	5	CuZn	Ni	★
9-158200	31	7	6	CuZn	Ni	
9-158300	31	8	7	CuZn	Ni	
9-158100	31	9	8	CuZn	Ni	



Wing nut M16x1.5 with long thread

Art. no.	Length (mm)	Connector diameter (mm)	Hose inner diameter (mm)	Material	Surface
9-158700	37	7	6	CuZn	Ni
9-158600	43	9	8	CuZn	Ni



Spare part for wing nut

Art. no.	Description	Material
9-041602	Replacement seal	Rubber



SCREW IN VALVES

ALLIGATOR special application

CONTENT

Screw in valves 158

Rim ferrule161

SCREW IN VALVES

Special application



Thread connection 1/4"-18NPTF

Art. no.	Length (mm)	Wrench size	Filling side	Material	Surface	Valve caps
9-901003	33	14	car (8V1)	CuZn	-	



9-900501



9-900511

Thread connection 1/8"-27NPT

Art. no.	Length (mm)	Wrench size	Filling side	Material	Surface	Valve caps
9-900501	33	11	car (8V1)	CuZn	-	
9-900511	33	11	car (8V1)	CuZn	Ni	



9-254501



9-254511



9-902001



9-902003

Thread connection G1/4

Art. no.	Length (mm)	Wrench size	Filling side	Material	Surface	Valve caps
9-254501*	33	22	car (8V1)	CuZn	-	
9-254511**	33	22	car (8V1)	CuZn	-	
9-902001	35	14	car (8V1)	CuZn	-	
9-902003	35	14	car (8V1)	CuZn	-	

* with sealing ring

** with sealing ring, without valve core



9-900883



9-901503

Thread connection G1/8

Art. no.	Length (mm)	Wrench size	Filling side	Material	Surface	Valve caps
9-900883	23	11	car (8V1)	CuZn	Ni	
9-901503	33	14	car (8V1)	CuZn	-	



Thread connection M8

Art. no.	Length (mm)	Wrench size	Filling side	Material	Surface	Valve caps
9-254201*	36	12	car (8V1)	CuZn	-	



Thread connection M8x1

Art. no.	Length (mm)	Wrench size	Filling side	Material	Surface	Valve caps
9-900843	18	10	car (8V1)	CuZn	Ni	
9-900845*	18	10	car (8V1)	CuZn	Ni	
9-900846*	18	10	car (8V1)	CuZn	Ni	
9-900863	21	12	car (8V1)	CuZn	Ni	

* with sealing ring



Thread connection M10x1

Art. no.	Length (mm)	Wrench size	Filling side	Material	Surface	Valve caps
9-902323	20	11	car (8V1)	CuZn	Ni	
9-902113	23	10	car (8V1)	CuZn	-	



Thread connection 8V1

Art. no.	Length (mm)	Wrench size	Filling side	Material	Surface
9-900809	18	12	car (8V1)	CuZn	-

RIM FERRULE

Accessories for rubber base valves

- **Application:** Required when tube valve TR13 is used for 15.7 valve hole.
- **Note:** Never use the ferrule in conjunction with rim valves (snap-in) and tubeless tires.



Rim ferrule TR13/TR15

Art. no.	TR no.	Material	Surface
9-049200	B6	Plastic	-



PART NUMBERS

9-030000.....	12	9-110201.....	103	9-146420.....	147	9-232640.....	117	9-330275.....	125	9-339182.....	79	9-377702.....	72	9-513103.....	33
9-030229.....	16	9-110215.....	103	9-146502.....	146	9-232650.....	117	9-330301.....	125	9-339251.....	79	9-377710.....	72	9-513143.....	33
9-030707.....	141	9-111002.....	105	9-146602.....	148	9-234300.....	144	9-330401.....	122	9-340121.....	88	9-378578.....	69	9-515003.....	34
9-030709.....	108	9-121004.....	106	9-146700.....	147	9-235020.....	116	9-330501.....	125	9-340241.....	88	9-378638.....	69	9-516023.....	33
9-030709.....	109	9-124599.....	106	9-147000.....	146	9-235041.....	116	9-330708.....	127	9-340331.....	88	9-378688.....	69	9-516103.....	36
9-030709.....	150	9-125100.....	106	9-147020.....	147	9-235051.....	116	9-330709.....	127	9-340401.....	88	9-378798.....	69	9-519003.....	34
9-030717.....	143	9-125100.....	128	9-147102.....	146	9-235061.....	116	9-330770.....	127	9-340441.....	88	9-378868.....	69	9-520542.....	27
9-030722.....	108	9-131512.....	108	9-147120.....	150	9-235800.....	119	9-330903.....	67	9-340501.....	88	9-381504.....	66	9-520944.....	98
9-030723.....	109	9-132101.....	111	9-147202.....	148	9-254201.....	159	9-330905.....	67	9-340541.....	88	9-381805.....	66	9-521214.....	38
9-030723.....	150	9-132611.....	111	9-147600.....	146	9-254501.....	159	9-330935.....	67	9-341241.....	88	9-382405.....	66	9-521515.....	27
9-030731.....	35	9-133201.....	111	9-147610.....	149	9-254511.....	159	9-331103.....	67	9-341871.....	88	9-382435.....	66	9-521515.....	98
9-030739.....	85	9-133201.....	141	9-147615.....	149	9-281845.....	154	9-331203.....	67	9-342021.....	88	9-382465.....	66	9-521520.....	27
9-030753.....	61	9-138100.....	107	9-147620.....	147	9-286188.....	154	9-331303.....	67	9-350641.....	89	9-382604.....	66	9-521527.....	27
9-030754.....	63	9-138300.....	107	9-148000.....	109	9-289760.....	154	9-331353.....	67	9-350661.....	89	9-382607.....	66	9-521527.....	98
9-031025.....	44	9-138600.....	107	9-148000.....	146	9-290090.....	90	9-331403.....	67	9-350671.....	90	9-382705.....	66	9-521545.....	27
9-031205.....	106	9-138800.....	107	9-148010.....	109	9-300000.....	123	9-331468.....	71	9-350721.....	89	9-382804.....	66	9-521545.....	98
9-031205.....	128	9-138900.....	107	9-148010.....	150	9-300007.....	124	9-331703.....	67	9-350771.....	89	9-382807.....	66	9-522018.....	27
9-031210.....	123	9-139000.....	107	9-148020.....	109	9-300116.....	124	9-332003.....	67	9-351071.....	89	9-382904.....	66	9-522032.....	27
9-032114.....	108	9-142200.....	142	9-148020.....	150	9-300117.....	124	9-332603.....	67	9-351171.....	89	9-382907.....	66	9-522036.....	27
9-032114.....	109	9-142300.....	142	9-148100.....	109	9-300118.....	124	9-332703.....	67	9-351241.....	89	9-383005.....	66	9-522070.....	27
9-032114.....	150	9-142310.....	143	9-148100.....	149	9-300119.....	124	9-332883.....	67	9-351242.....	90	9-394927.....	123	9-522099.....	27
9-033030.....	143	9-142400.....	142	9-148200.....	109	9-300125.....	124	9-332903.....	67	9-351411.....	89	9-394928.....	123	9-522445.....	27
9-033180.....	106	9-142500.....	142	9-148200.....	147	9-300500.....	122	9-333006.....	72	9-351641.....	89	9-394929.....	123	9-523018.....	27
9-033181.....	106	9-142700.....	92	9-148500.....	108	9-301500.....	122	9-333008.....	70	9-351871.....	89	9-410503.....	97	9-523036.....	27
9-033182.....	106	9-142700.....	144	9-148500.....	147	9-302100.....	123	9-333068.....	70	9-351971.....	90	9-440003.....	97	9-523099.....	27
9-033245.....	91	9-142800.....	92	9-148520.....	108	9-303070.....	123	9-333106.....	72	9-352071.....	90	9-445011.....	99	9-523131.....	27
9-033245.....	135	9-142800.....	144	9-148600.....	108	9-303220.....	123	9-333108.....	70	9-352171.....	89	9-446013.....	97	9-523445.....	27
9-033365.....	79	9-142999.....	138	9-148600.....	149	9-304000.....	91	9-333206.....	72	9-352421.....	89	9-447413.....	96	9-524145.....	27
9-033401.....	139	9-143000.....	138	9-149946.....	153	9-304000.....	129	9-333208.....	70	9-352422.....	90	9-447500.....	96	9-525018.....	27
9-041602.....	155	9-143100.....	138	9-149955.....	153	9-304500.....	91	9-333268.....	70	9-352711.....	89	9-447505.....	96	9-525036.....	27
9-049151.....	105	9-143350.....	138	9-149970.....	153	9-304500.....	129	9-333306.....	72	9-352801.....	89	9-447512.....	99	9-525445.....	27
9-049151.....	128	9-143400.....	92	9-149978.....	111	9-305000.....	91	9-333308.....	70	9-356070.....	90	9-447513.....	96	9-529445.....	27
9-049157.....	105	9-143400.....	139	9-149979.....	110	9-305000.....	129	9-333328.....	70	9-370008.....	68	9-447515.....	99	9-529900.....	29
9-049157.....	128	9-143501.....	143	9-149979.....	154	9-312000.....	133	9-333406.....	72	9-370013.....	68	9-511003.....	35	9-529902.....	29
9-049200.....	161	9-143505.....	143	9-149980.....	110	9-312500.....	133	9-333408.....	70	9-370018.....	68	9-511003.....	96	9-529904.....	29
9-093019.....	124	9-143976.....	140	9-149980.....	154	9-314011.....	135	9-333506.....	72	9-370023.....	68	9-511983.....	33	9-529910.....	29
9-093032.....	122	9-144001.....	141	9-149981.....	111	9-315000.....	135	9-333508.....	70	9-370028.....	68	9-511992.....	35	9-529912.....	29
9-093118.....	135	9-144051.....	140	9-149990.....	119	9-315150.....	133	9-333608.....	70	9-370038.....	68	9-511992.....	96	9-529914.....	29
9-093123.....	135	9-144101.....	141	9-158000.....	155	9-315500.....	135	9-333708.....	70	9-370163.....	68	9-511993.....	35	9-529920.....	29
9-093135.....	135	9-144121.....	141	9-158100.....	155	9-317211.....	133	9-333808.....	70	9-370168.....	68	9-511993.....	96	9-529922.....	29
9-093524.....	89	9-144151.....	140	9-158200.....	155	9-319700.....	91	9-333908.....	70	9-370183.....	68	9-512013.....	36	9-529924.....	29
9-095519.....	38	9-144171.....	140	9-158300.....	155	9-319700.....	135	9-336108.....	71	9-370188.....	68	9-512462.....	33	9-529930.....	29
9-095554.....	38	9-144901.....	143	9-158600.....	155	9-319900.....	91	9-336408.....	71	9-370198.....	68	9-512503.....	33	9-529932.....	29
9-097738.....	50	9-145451.....	141	9-158700.....	155	9-319900.....	135	9-336507.....	69	9-370223.....	68	9-512507.....	33	9-529934.....	29
9-097739.....	51	9-145651.....	141	9-230500.....	119	9-320000.....	69	9-336508.....	71	9-370228.....	68	9-512512.....	32	9-529950.....	29
9-097745.....	50	9-146000.....	146	9-230700.....	93	9-320000.....	72	9-336509.....	71	9-370248.....	68	9-512514.....	32	9-529954.....	29
9-097747.....	51	9-146010.....	109	9-230700.....	119	9-321800.....	97	9-336518.....	71	9-370253.....	68	9-512553.....	33	9-530020.....	39
9-097748.....	51	9-146010.....	150	9-231900.....	115	9-322200.....	78	9-337501.....	72	9-370288.....	68	9-512558.....	34	9-530021.....	39
9-097752.....	51	9-146011.....	108	9-231930.....	115	9-322215.....	78	9-338258.....	71	9-370328.....	68	9-512563.....	33	9-530030.....	39
9-097755.....	50	9-146020.....	108	9-231940.....	115	9-323020.....	35	9-338501.....	92	9-370388.....	68	9-512568.....	34	9-530031.....	39
9-105000.....	105	9-146020.....	109	9-232500.....	118	9-324603.....	78	9-338601.....	92	9-370408.....	68	9-512573.....	32	9-530040.....	39
9-105300.....	105	9-146020.....	150	9-232503.....	118	9-324701.....	78	9-339002.....	79	9-370428.....	68	9-512583.....	32	9-530041.....	39
9-110000.....	103	9-146100.....	148	9-232505.....	117	9-324703.....	78	9-339051.....	79	9-370438.....	68	9-512593.....	32	9-530050.....	39
9-110001.....	103	9-146200.....	147	9-232511.....	118	9-328501.....	55	9-339091.....	79	9-370440.....	68	9-512628.....	33	9-530060.....	39
9-110002.....	103	9-146400.....	146	9-232540.....	118	9-329201.....	85	9-339101.....	79	9-371198.....	70	9-513003.....	33	9-534043.....	76
9-110010.....	103	9-146410.....	149	9-232602.....	117	9-330201.....	122	9-339181.....	79	9-377700.....	72	9-513043.....	34	9-542503.....	76































9-544501.....	77	9-734203.....	62	9-770943.....	59	9-850121.....	87
9-544503.....	77	9-734303.....	62	9-770963.....	59	9-850131.....	87
9-544543.....	77	9-735101.....	61	9-770973.....	57	9-850154.....	87
9-545503.....	77	9-735103.....	61	9-770993.....	57	9-850167.....	87
9-546503.....	77	9-735203.....	62	9-771033.....	57	9-850191.....	87
9-547503.....	77	9-735303.....	62	9-771043.....	57	9-900501.....	158
9-590046.....	34	9-735601.....	61	9-771093.....	57	9-900511.....	158
9-590904.....	12	9-735603.....	61	9-771153.....	55	9-900809.....	160
9-590906.....	12	9-735703.....	62	9-771154.....	55	9-900843.....	160
9-590908.....	12	9-735801.....	62	9-771163.....	55	9-900845.....	160
9-590914.....	12	9-735803.....	62	9-771170.....	55	9-900846.....	160
9-590916.....	13	9-736101.....	61	9-771183.....	55	9-900863.....	160
9-590918.....	13	9-736103.....	61	9-771243.....	55	9-900883.....	159
9-590919.....	15	9-736223.....	62	9-771253.....	55	9-901003.....	158
9-590922.....	17	9-736343.....	62	9-771283.....	55	9-901503.....	159
9-590923.....	11	9-736353.....	62	9-771510.....	52	9-902001.....	159
9-590924.....	11	9-736601.....	61	9-771515.....	52	9-902003.....	159
9-590925.....	11	9-736703.....	62	9-771520.....	52	9-902113.....	160
9-590926.....	11	9-736803.....	62	9-771530.....	52	9-902323.....	160
9-590933.....	15	9-736833.....	62	9-771544.....	52		
9-590938.....	15	9-737613.....	61	9-771550.....	52		
9-590961.....	14	9-750603.....	53	9-771555.....	52		
9-590965.....	14	9-750701.....	53	9-771783.....	55		
9-591061.....	14	9-751101.....	53	9-773016.....	47		
9-591122.....	14	9-751103.....	53	9-773513.....	48		
9-591123.....	14	9-752303.....	53	9-773553.....	48		
9-591124.....	14	9-752603.....	53	9-774117.....	49		
9-594012.....	76	9-752803.....	53	9-774213.....	49		
9-594150.....	35	9-753303.....	53	9-779677.....	51		
9-701601.....	63	9-753603.....	53	9-799810.....	44		
9-703101.....	63	9-753803.....	53	9-799820.....	44		
9-710101.....	63	9-770103.....	49	9-799830.....	44		
9-710601.....	63	9-770223.....	49	9-799840.....	44		
9-711601.....	63	9-770233.....	49	9-799924.....	44		
9-711701.....	63	9-770273.....	49	9-799926.....	44		
9-712601.....	63	9-770283.....	49	9-799998.....	44		
9-712701.....	63	9-770303.....	49	9-820061.....	84		
9-713201.....	63	9-770333.....	49	9-820141.....	84		
9-730163.....	61	9-770383.....	49	9-820146.....	84		
9-730173.....	61	9-770503.....	47	9-820161.....	84		
9-730603.....	61	9-770583.....	49	9-820166.....	84		
9-730613.....	61	9-770625.....	48	9-820171.....	84		
9-730623.....	61	9-770630.....	47	9-820176.....	84		
9-731103.....	61	9-770633.....	47	9-820191.....	84		
9-731601.....	61	9-770643.....	48	9-820201.....	85		
9-731603.....	61	9-770646.....	48	9-820226.....	85		
9-731701.....	62	9-770669.....	50	9-820236.....	85		
9-731723.....	62	9-770686.....	51	9-820261.....	85		
9-732213.....	62	9-770695.....	50	9-820266.....	85		
9-732253.....	62	9-770696.....	51	9-820286.....	85		
9-732301.....	61	9-770697.....	51	9-820341.....	85		
9-732303.....	61	9-770699.....	50	9-820381.....	85		
9-733101.....	61	9-770704.....	48	9-830061.....	86		
9-733103.....	61	9-770723.....	57	9-830146.....	86		
9-733203.....	62	9-770733.....	57	9-830161.....	86		
9-733303.....	62	9-770753.....	59	9-830166.....	86		
9-733723.....	62	9-770773.....	59	9-830176.....	86		
9-733813.....	62	9-770863.....	59	9-830236.....	86		
9-734101.....	61	9-770883.....	59	9-830261.....	86		
9-734103.....	61	9-770933.....	59	9-830266.....	86		



Lined area for notes on page 168.

Lined area for notes on page 169.



Vehicles	Material	Features
 motorcycle	 brass	 round top valve cap
 scooter	 aluminium	 long round top valve cap
 bicycle	 steel	 plastic valve cap with sealing
 car	 rubber	 plastic valve cap without sealing
 van	 plastic	 hexagonal valve cap
 truck	 nickel-plated	 screw driver valve cap
 tractor	 anodized	 plastic valve extension cap
 earthmover (EM)	 zinc-plated	 metal valve extension cap
Norms		 DS-P valve cap
TR	Tire and Rim Association (US)	 V2B valve cap
ETRTO	European Tyre and Rim Technical Organisation	 hexagon nut
		 external hexagon valve base



AUS PRINT PDF ENTFERNEN!

ALLIGATOR is a brand
of WEGMANN automotive.

WEGMANN automotive GmbH
Rudolf-Diesel-Straße 6
97209 Veitshöchheim
GERMANY

Phone: +49 (0) 931 321 04 0
E-Mail: info@wegmann-automotive.de

www.alligator-valves.com

